

KZXTEU

THIN DIE-CAST ALUMINUM EXIT SIGN



STANDARD



ILLUMINATION

Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.


ORDERING INFORMATION

- Specification-grade, low profile, thin aluminum die-cast design.
- Available in single or double face only.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

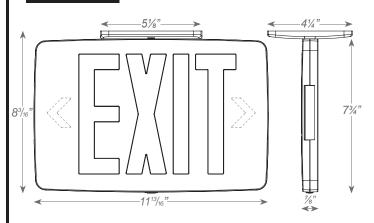

Sample Part Number: KZXTEU1RW

	MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY	
-	KZXTEU	1	Single Face	R	Red	W	White	(blank)	AC-Only
		2	Double Face	G	Green	В	Black	EM	Battery Backup
	,	www.emergency-lighting							