

# BAL650C-4ACTD

## 4-PIN CFL FLUORESCENT EMERGENCY BALLAST 750 LUMENS

STANDARD



### ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one or two lamps in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 750 lumens.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- AC output ensures compatibility with newer lamp technologies and helps prolong lamp life.
- Time delay enhancement to overcome end-of-life circuit protection.

### MOUNTING

- Suitable for installation inside, on top or in remote\* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

### HOUSING


- Durable painted steel construction in white finish.
- Provided with 2' flex conduits on both ends.
- Compact design fits most fluorescent fixtures.

### WARRANTY / LISTING


- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

### LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one or two T5, T5HO, T8, T12, Circular T9, U-bend T8/T12, 4-Pin CFL and Long CFL lamps in emergency mode. Refer to the chart below for a complete list of compatible lamps.

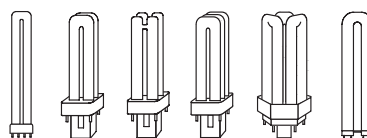

### DIMENSIONS

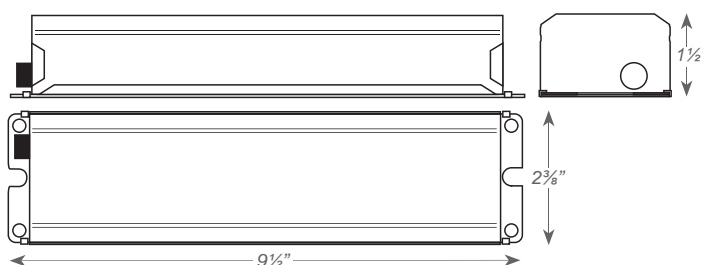

### LAMP COMPATIBILITY CHART

\* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP
14	T5	450	500
21	T5	550	N/A
28	T5	600	N/A
39	T5HO	650	N/A
25	T8	600	N/A
32	T8	675	N/A

WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP
40	T8	700	N/A
40	T12	650	N/A
13	CFL G24q-1	450	500
18	CFL G24q-2	500	575
26	CFL G24q-3	575	N/A
32	CFL G24q-4	750	N/A
18	CFL 2G11	525	625

WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP
36	CFL 2G11	600	N/A
40	CFL 2G11	650	N/A
32	Circular T9	575	N/A
40	Circular T9	625	N/A
32	U-bend T8	650	N/A
34	U-bend T12	600	N/A

NOTE: In 2-lamp operation, lumens are equally split between the two lamps.

EMERGENCY BACKUP

BAL650C-4ACTD