



DIMENSIONS

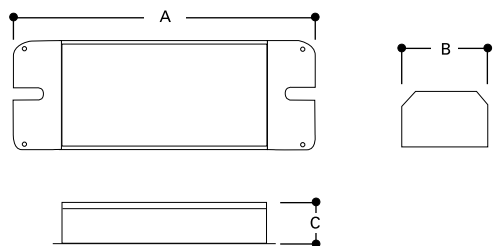

	A	B	C
FP450	9 5/16" (237mm)	2 3/8" (60mm)	1 1/2" (38mm)
FP550	18 1/2" (470mm)	1.18" (30mm)	1.18" (30mm)
FP1100	9 3/8" (238mm)	2 3/8" (60mm)	1 1/2" (38mm)
FP1500	9 3/8" (238mm)	2 3/8" (60mm)	1 1/2" (38mm)
FP2200	9 3/8" (238mm)	2 3/8" (60mm)	1 1/2" (38mm)
FP94	9 3/8" (238mm)	2 3/8" (60mm)	1 1/2" (38mm)
FP30	16 5/16" (127mm)	5 7/16" (56mm)	1 3/4" (44mm)
FP500	18 1/2" (470mm)	1.18" (30mm)	1.00" (25mm)

DESCRIPTION

The FP Battery Series converts any new or existing fluorescent fixture into emergency lighting. It can eliminate the need for conventional emergency lighting units, thus improving the aesthetics of a space.



FP Battery Pack

**Battery Back-up
Emergency Unit
Fluorescent Lamps**

EMERGENCY LIGHTING

ORDERING INFORMATION

Catalog No.	Lamps Operated in Emergency Mode	Emergency Run Time	Emergency Lumen Output
FP450	1 Lamp 2' - 4' (20W - 40W)	90	450
FP550	1 Lamp T5 (14W - 54W)	90	390-700
FP1100	1 Lamp 2' - 8' (20W - 215W)	90	1100
	2 Lamp 2' - 4' (20W - 40W)		
FP1500	1 Lamp Compact Fluorescent 5, 7, 9, 13 W Twin Tube, or 2 Pin Quad	90	650
FP2200	1 Lamp Compact Fluorescent 10, 13, 16, 18, 22, 26W Quad, or 2 Pin with Flex	90	850
FP94	1 Lamp, 6-42W, 4 Pin with Flex	90	750
FP30	1 or 2 Lamps, F032T8	90	1450-3500
FP500	1 Lamp, T5 (14-28W)	90	370-520

OPTIONS: Add to Catalog No.

Description	Code
Remote Test Switch	RTS
One Gang Plate and Metal End Caps to Cover Wire	FC 6

- Dual 120/277VAC 60 Hz input
- Fully automatic solid state charger; automatic transfer relay energizes lamp instantaneously upon failure of normal AC power
- Compatible with standard, energy-saving, dimming and electronic AC ballasts
- Operates with either switched or unswitched fixtures
- Compact fluorescent emergency packs are supplied with a one-gang plate with a test switch and pilot light power indicator
- Sealed, maintenance-free high temperature nickel cadmium battery
- A single 16 gauge housing contains the battery, charger, transfer electronics and inverter ballast