



TYPE _____

CATALOG# _____

CA

Cast Aluminum L.E.D. Exit Sign

GENERAL DESCRIPTION

Longevity, durability, and reliability make the Model CA Cast Aluminum exit sign the right choice for schools, theaters, hospitals or any commercial or industrial application where high strength construction is preferred. Clean bright illumination is provided by the highest quality LED's. Universal Application Exit Sign includes two stencils with back cover and canopy.

HOUSING

High strength cast aluminum, low profile design, with hinged faceplate and field selectable chevrons. End, Ceiling or Wall mount options install in minutes. Signage is 6" letters with 3/4" stroke.

ILLUMINATION

Long lasting high output AllInGaP LED's with the highest performance and least degradation available in the market with a rated life of 10 years plus.

ELECTRONICS

Emergency operation units provided with solid state design with low voltage disconnect, AC lockout, brown out protection, and AC indicator test switch. Battery is sealed maintenance free Nickel Cadmium with an estimated service life of 7 years. Circuitry is constant current design and recharge time is less than the required UL 924 standard. All units are standard dual voltage 120/277 and draw less than 3 watts.



CODE COMPLIANCE

Tested and Listed to UL 924 for damp location, meets or exceeds NFPA, NEC, and OSHA illumination standard.

WARRANTY

5 years on housing and electronics with a 7 year pro rated warranty on battery.

DIE CAST LIGHT STYLE™ SERIES

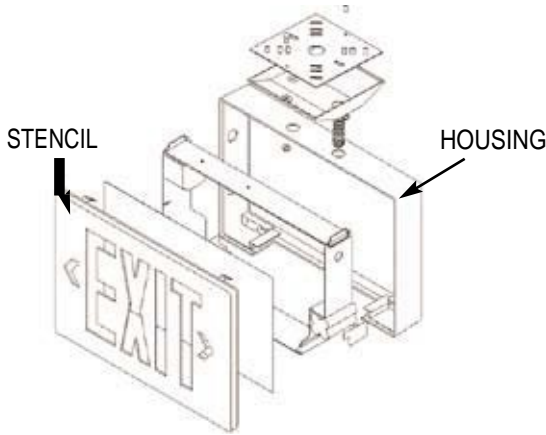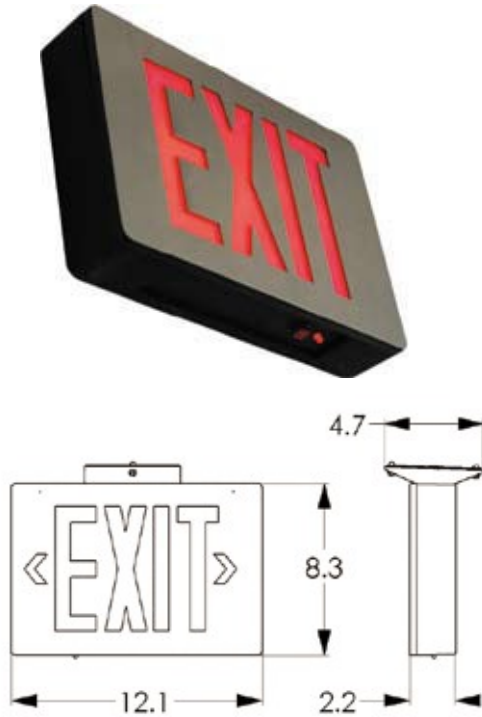

CA

Model

Model	Mounting	Letter Color	Housing Color	Stencil	Unit Power Configuration	Factory Installed Options
	1 = Single Face Wall Mount 1C = Single Face with Canopy 2C = Double Face with Canopy	R = RED G = GREEN	W = White B = Black	BA = Brushed Aluminum W = White B = Black	AC = AC Only EM = Battery Backup DI = Two Transformer Input	FL = Flasher Only. Flashes only when unit goes into emergency condition. Battery Units Only. FA = Fire Alarm Interface. Flashes in both modes when signal from fire alarm panel is received (6 to 24 VDC). FLA = FL option with audible alarm. Battery Units Only. FAA = FA option with audible alarm FPM = Swivel Pendant Mount Kit SD = Self Diagnostics SW = Special Wording Available TMP = Tamper-Proof Screws TMPD = Tamper-Proof Screw Driver

