



TYPE \_\_\_\_\_

CATALOG# \_\_\_\_\_

## EEU-2

I.e.d. eXIT eMERGENCY Combination Unit

### GENERAL DESCRIPTION

The unit, featuring sleek shallow height (8.5"), will blend nicely into any environment. The EEU-2 offers a smooth contoured transition from the exit to the two emergency heads while providing the flexibility of back, or canopy mount with an additional exit stencil standard. A downlight feature adds to the value which operates only in emergency mode illuminating the doorway is standard. Unit is also remote capable. (See EEU-2-16)

### HOUSING

UV Stable Thermoplastic flame retardant meets UL standard 95-VA. Standard white or black finish (matches all products in same family) features quick and easy installation via a snap-in design. Unit installs in less than 5 minutes and is prewired at factory. Replaceable chevron directional indicator offers a choice of direction on both stencils.

### ILLUMINATION

Two 5.4 Watt 6V lamps mounted in precision formed photometrically optimized reflector assemblies exceed illumination required by UL 924. The soft etched lens eliminates glare and striation often associated with prismatic spread lenses while providing even distribution along areas of egress. Long lasting high output AlInGaP LED's with the highest performance and least degradation available in the market with a rated life of 25 years plus illuminates the exit face (See chart on reverse side.) Red illumination requires 12 LED's per while the Green option requires just 6 per.

### ELECTRONICS AND BATTERY

Dual Voltage 120/277 VAC input facilitates the fully automatic Solid State charging system which features (LVD) Low Voltage Disconnect, AC lockout installation, brown-out protection, AC indicator LED light with push to test button standard. The maintenance free Special 6 AH sealed led calcium battery provides a minimum of 90 minutes of illumination in emergency mode with an average life of 12 years. Optional Nickel Cadmium battery & 220V input also available.

### CODE COMPLIANCE

Tested and Listed to UL 924 for damp location, meets or exceeds NFPA, NEC, and OSHA illumination standard.


### WARRANTY

5 years on housing and electronics with a 5 year pro rated warranty on battery.


COMMERCIAL SERIES



### DIMENSIONS

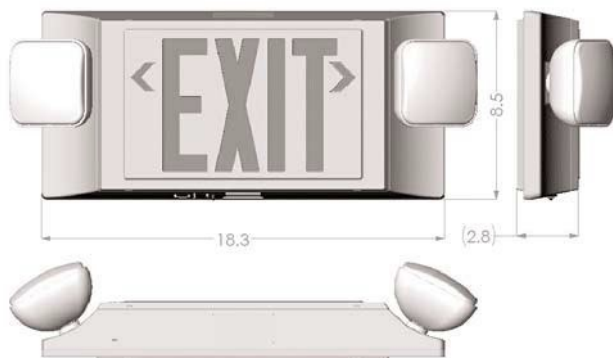

Dimensions in Inches

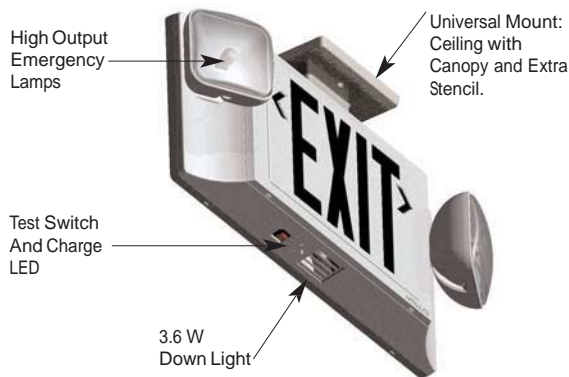

## EEU-2

Model

### Remote Option

### Letter Color

### Housing Color

### Factory Installed Options

<b>Blank</b> = No Remote <b>16</b> = 16W Remote Capable	<b>R</b> = RED <b>G</b> = GREEN	<b>B</b> = Black <b>W</b> = White	<b>220</b> = 220 VAC Input <b>NC</b> = NiCd Battery <b>SD</b> = Self Diagnostics <b>SW</b> = Special Wording <b>H10</b> = 10W Halogen Lamps
--	------------------------------------	--------------------------------------	---

