




EM-8000

DUAL-HEAD EMERGENCY LIGHT w/ BATTERY

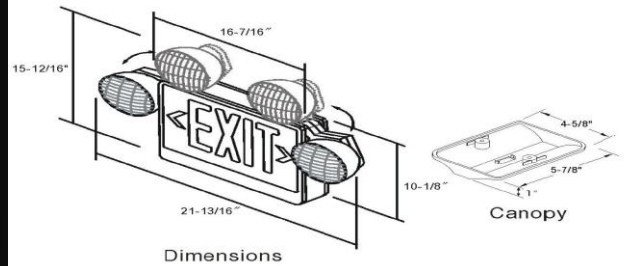

STANDARD FEATURES

HOUSING

- *Injection-molded thermoplastic ABS housing.
- *UL 94V-0 flame rating.
- *Innovative, snap-together design allows for fast installation.
- *Replaceable directional chevron inserts are easily removed and reinserted.
- *Letters 6" height with 3/4" stroke.
- *Single or double face configuration.
- *Two fully adjustable glare-free round shape light heads for emergency light.

MOUNTING

- *Wall or Ceiling mounting.
- *Housing snaps to canopy with a simple twist and locking tight & securely to housing canopy.

ELECTRICAL FEATURES

ELECTRICAL

- *120/277 VAC Dual voltage operation.
- *Low power consumption - 3.8 watts at normal operation, 15 watts at emergency operation.
- *LED indicator light and push button test switch.
- *Remote capability - may power additional remote heads (up to 6V 12W) with additional battery.

LAMPS

- *LEDs mounted on print circuit board.(for Exit Sign)
- *LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- *2 X 6V 5.4 watts DC T5 wedge base lamps for emergency mode.

BATTERY

- *Lead-Calcium Battery ([P/N 255](#)).
- *Must use additional battery, when adding a remote light head to the fixture. (Total 2 X 6V 4.5 Ah battery)
- *Low voltage battery disconnection.

TO ORDER PLEASE VISIT: WWW.EMERGENCYLIGHTING.COM or call toll free: 1-800-521-4045 ref# EM-8000

WWW.EMERGENCYLIGHTING.COM toll free 1-800-521-4045

TO ORDER PLEASE VISIT: WWW.EMERGENCYLIGHTING.COM or call toll free: 1-800-521-4045 ref# EM-8000