



MF40-LP1300



LOW-PROFILE FLUORESCENT EMERGENCY BALLAST



PROJECT:
FIXTURE TYPE:
LOCATION:
CONTACT/PHONE:

PRODUCT SPECIFICATIONS

APPLICATION

The MF40-LP1300 low-profile fluorescent emergency ballast works in conjunction with the AC ballast to convert new or existing fluorescent fixtures into emergency lighting. The emergency ballast consists of a high-temperature nickel cadmium battery, charger and electronic circuitry in one compact case. The MF40-LP1300 can be used with one (1) 14W-54W (2' - 4') T5 fluorescent lamps, 17W-40W T8 lamps without integral starters, and 17W-55W 4-pin long compact lamps. It is also compatible with most electronic and dimming AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. This ballast is not suitable for use in air handling heated air outlet fixtures, and wet or hazardous location fixtures. For information about specific lamp and ballast compatibility, please consult the factory. This ballast has additional features, such as time-delay enhancement and open circuit isolation that enables the emergency battery pack to function smoothly with 'End-of-Lamp-Life' circuitry in newer AC ballasts. This would provide an additional level of unit production from over-voltage caused by an absence of lighting load.

OPERATION

When AC power fails, the MF40-LP1300 immediately switches to the emergency mode, keeping one lamp illuminated at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the ballast automatically returns to the charging mode.

INSTALLATION

The MF40-LP1300 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The MF40-LP1300 may be installed inside or on top of the fixture. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C for extended periods.

UL AND CODE COMPLIANCE

The MF40-LP1300 has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electric Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.

BATTERY

Since high temperatures exist in fluorescent fixtures, the MF40-LP1300 uses a specially constructed, high-temperature nickel cadmium battery. This battery requires no maintenance, and has a life expectancy of 7 to 10 years.


EMERGENCY ILLUMINATION

The MF40-LP1300 produces 1300 lumens initial emergency output. During emergency illumination, one lamp is illuminated, even if installed with a multilamp AC ballast. Emergency lumen output will be less with a compact fluorescent lamp.


SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with MF40-LP1300 emergency ballast. This emergency ballast shall consist of a high-temperature, maintenance-free nickel cadmium battery, charger and electronic circuitry contained in one 14.2" x 1.1" x 1.2" metal case. A solid-state charging indicator light to monitor the charger and battery, a single-pole test switch, and installation hardware shall be provided. The emergency ballast shall be capable of operating one (1) 14W-54W (2' - 4') T5, 17W-40W T8 fluorescent lamps without integral starters, and 17W-55W 4-pin long compact lamps at reduced illumination in the emergency mode for a minimum of 90 minutes. The MF40-LP1300 shall produce 1300 lumens initial emergency light output, have 2.5 Watts of input power, a 21 Watt-hour battery capacity, and comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation inside, on top of, or remote from the fixture, warranted for a full five years from date of purchase.


SWITCHED



UNSWITCHED



Primary circuit only. Lamp leads not shown.

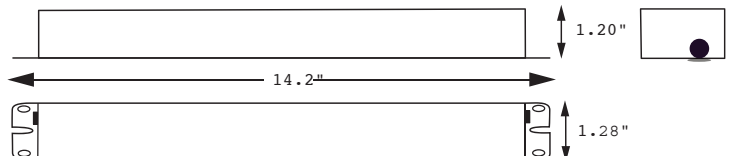



MF40-LP1300



LOW-PROFILE FLUORESCENT EMERGENCY BALLAST

PROJECT:
FIXTURE TYPE:
LOCATION:
CONTACT/PHONE:

WARRANTY

Model MF40-LP1300 is warranted for five full years from date of purchase. This warranty covers only properly installed emergency ballasts used under normal conditions. For the warranty period Mule will, at its option, repair or replace without charge a defective emergency ballast, provided it is returned to the factory transportation prepaid, and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

PRODUCT SUMMARY

UL LISTED Factory or Field Installation	DUAL VOLTAGE INPUT 120/277 VAC 60 Hz	BATTERY High-Temperature Maintenance-Free Nickel-Cadmium Battery 7-10 Year Life Expectancy	TEMPERATURE RATING (AMBIENT) 0°C TO +55°C (32°F TO 131°F)
ILLUMINATION 90 Minutes	AC INPUT CURRENT 126mA/122mA	BATTERY CHARGING CURRENT 126mA/122mA	DIMENSIONS 21.5" x 1.28" x 1.2" Mounting center 20.9"
INITIAL LIGHT OUTPUT 1300 Lumens	AC INPUT POWER RATING 2.5 Watts	RECHARGE TIME 24 Hours	WEIGHT 2.1 lbs (0.9 kg)
FULL WARRANTY 5 Years (NOT pro-rata)	TEST SWITCH Single pole	CHARGING INDICATOR LIGHT LED	

LAMP COMPATIBILITY

LAMP DIAMETER	BASE	WATTAGE (Length)	NO. of LAMPS (EMERGENCY)
T5/HO	Miniature Bipin	24-54 W (2'-4')	1
T5	Miniature Bipin	14-28 W (2'-4')	1
Long Compact	4-pin (2G11)	36-55 W	1
T8	Bipin	32 W (4')	1
		40 W (5')	1
T8/HO	Bipin	44 W (4')	1

Lamp	Initial Lumens
1-lamp	
T5 14W	700
T5 21W	850
T5 28W	1100
T5HO 39W	1200
T5HO 54W	1300
T8 17W	950
T8 32W	1100
T12 20W	900
T12 40W	1200

Lamp	Initial Lumens
1-lamp	
4-pin PL CF 13W	800
4-pin PL CF 18W	950
4-pin PL CF 26W	975
4-pin PL CF 32W	1025
4-pin PL CF 42W	1075
4-pin Long CF 18W	925
4-pin Long CF 24W	950
4-pin Long CF 36W	1025
4-pin Long CF 40W	1050
4-pin Long CF 50W	1100