


exit LIGHTING



Optional self-diagnostic/self-test feature offers the ultimate in worry-free maintenance and reliability.




SALIDA faceplates also available.



FEATURES

- Emergency operation of 90+ minutes on Battery Backup (EM) models
- Completely self-contained
- Fully automatic operation
- Compact, low-profile design in neutral finish
- Push-to-test switch
- Automatic, low-voltage disconnect (LVD)
- 120 or 277 VAC operation
- Injection-molded, V-0 flame retardant, high-impact thermoplastic housing
- Charge rate/power on LED indicator light
- Energy consumption of 3.2 watts for red letters and 3.8 watts for green letters
- LED lamp life of 25 years plus
- Universal mounting canopy for side or top installation
- Standard AC and emergency units available
- Ni-Cad battery on emergency (EM) units

DIMENSIONS

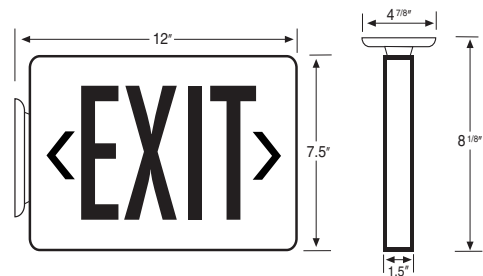

Ordering Information

| Series | Canopy | Number of faces | Letter Color | Housing Color | Damp Location | Models available for Quick Ship |
|--------|---|--|------------------|--------------------|---------------|---|
| EZXTE | U- (Universal mounting canopy included) | 1-Single Face 2-Double Face (Universal) | R-Red G-Green | W-White B-Black | Yes | EZXTEU2RW EZXTEU2GW (AC-only) EZXTEU2RW-EM EZXTEU2GW-EM (Battery backup) |



When ordering, specify suffix "SDT" for the Self-Diagnostic feature, and suffix "DC" for the Dual Circuit feature.

Remote-capable units also available.

EZXTE