



TYPE \_\_\_\_\_

CATALOG# \_\_\_\_\_



# GIM-36

PAR-36 HALOGEN GIMBAL EMERGENCY LIGHT

COMMERCIAL SERIES



DIMENSIONS

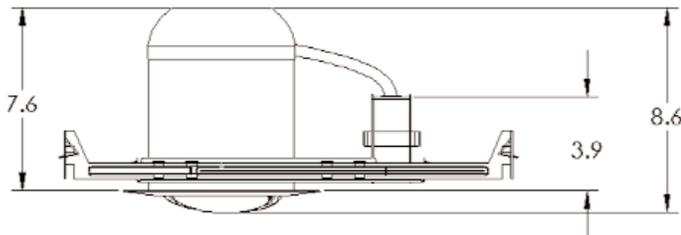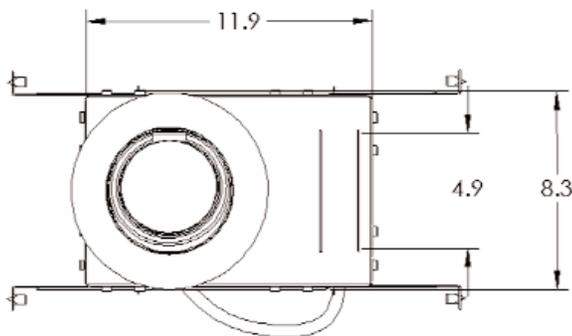

### GENERAL DESCRIPTION

Fully-adjustable 8 Watt PAR 36 halogen emergency light provides light where you want it without the restrictions associated with conventional gimbal offerings. Suitable for air handling plenums, this recessed, completely self-contained unit will blend nicely in any application where path of egress and or general illumination is required upon loss of AC power.

### HOUSING

All metal housing with adjustable integral universal mounting bars will attach to lay-in ceiling or ceiling joist. Battery and test switch are completely self contained within, providing flexibility to adapt to most all shallow and standard plenum applications.

### ILLUMINATION

8 Watt Sealed Beam PAR 36 halogen fully adjustable

### ELECTRONICS & BATTERY

Dual Voltage 120/277 VAC input facilitates the fully automatic Solid State charging system which features (LVD) Low Voltage Disconnect, AC lockout installation and brown-out protection and AC indicator LED light standard. The maintenance-free Special 6 AH sealed led acid battery provides a minimum of 90 minutes of illumination in emergency mode with an average life of 12 years. Optional Nickel Cadmium battery also available. Push to test and AC indicator conveniently located on flange.

### CODE COMPLIANCE

Tested and Listed to UL 924. Meets or exceeds NFPA NEC and OSHA illumination standards. UL listed.

### WARRANTY

5 years on housing and electronics with a 7 year pro rated warranty on battery



## GIM-36

MODEL

LAMP

TRIM COLOR

H8 = 8 WATT HALOGEN

CONSULT FACTORY FOR OTHER LAMP OPTIONS

W = WHITE  
B = BLACK

