



Astralite Inverter

Three Phase 3KW - 125KW

WARRANTY


- 1-year full warranty on system electronics
- 1-year full warranty with 9-year pro-rated warranty on battery
- Extended warranty available
- Maintenance contracts available
- 1-year on-set warranty labor if the inverter system is commissioned by Astralite and is performed by an Astralite authorized service agent

CABINETS

- Space saving, small footprint with modular designs allows for flexible installation
- Standard free standing enclosure with power coat finish
- Optional NEMA – 3r, 4x, or 12 Cabinets with forced air cooling for maximum reliability
- Dimensions - W x H x D - 42" x 71" x 22.5" (3KW-40KW)
50" x 71" x 32" (60KW-125KW)

STANDARDS

- Listed to UL924, meets NFPA 101, NFPA 70, NEC and OSHA standards

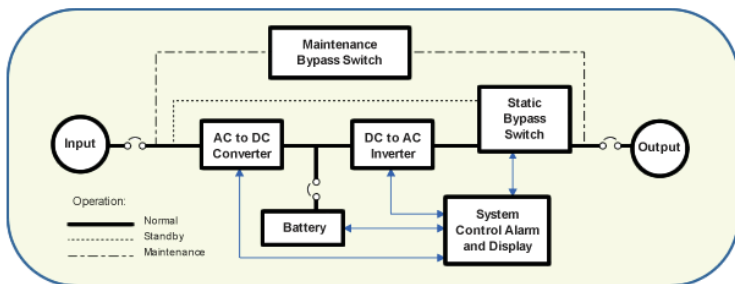

ORDERING INFORMATION:

INV-P3				
FAMILY	POWER RATING		VOLTAGE	OPTIONS
	KW		Input Output	
	3.0	24.0	208	208Y/120
	4.5	30.0	208Y/120	480Y/277
	6.0	40.0	480	
	8.0	60.0	480Y/277	
	10.0	80.0		
	12.0	100.0		
	16.0	125.0*		
	20.0			

* Consult factory for more options

INV-P3-3K/125K



APPLICATIONS

- True online lighting inverter with full light output
- Operates fluorescent, compact fluorescent, incandescent, quartz H.I.D., L.E.D and other lamp types

MAINTENANCE

- Hassle-free maintenance – the unit automatically performs periodic self-tests

DIAGNOSTICS AND CONTROLS

- Advanced front panel LED display indicating unit status, metering, battery status, alarm event log
- Single point of testing

ETM120 - 120V Environmental control module /qty
 ETM277 - 277V Environmental control module /qty
 SPC - Specialized enclosure*
 NF - Normally standby configuration
 OCB - 20 Amps output circuit breakers /voltage /quantity
 SRM - Seismic rated bracket
 STUM - Onsite start-up
 IDB - Internal dimmer bypass
 EMB - External maintenance bypass switch
 EW - Extended warranty