




BENEFITS & FEATURES

- Completely self-contained
- Sealed maintenance-free lead calcium batteries
- Provides a minimum emergency duration of 90 minutes
- Rugged steel housing with white baked enamel finish
- 120/277 volt selectable input
- Remote capability on larger models
- Low voltage disconnect
- Brownout protection
- Universal mounting
- 100% solid state charger
- Sealed relay
- Fully adjustable, non-slip, high impact 94V-0, thermo-plastic heads
- LED AC pilot and "READY" indicators
- Push-to-test switch
- Several lamp selections
- Available with 3 lamp heads

DURABLE EMERGENCY LIGHT

Compact and conventional, the LX Series emergency light units are ideal for commercial applications and designed for ease of installation and economy. The rugged steel housing and white baked enamel finish give the LX Series both industrial strength and an attractive appearance. This series is available in several voltages and wattages.

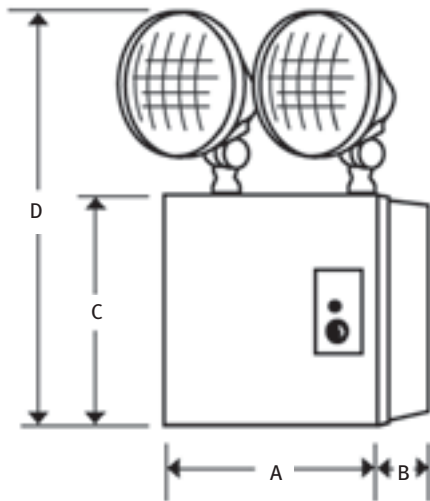

DIMENSIONS

WATTAGE	DIMENSIONS (INCHES)			
	A	B	C	D
18W-27W	10.12	3.62	7.75	14.25
36W-100W	12.25	3.62	7.75	14.25

LAMP SELECTION

TYPE	OPTIONS	WATTS
6V Tungsten	Standard:	7.2W, 9W
	Halogen (H):	8W, 10W, 12W
6V Sealed Beam	Standard (SB):	9W, 12W
	Halogen (SBH):	12W
12V Tungsten	Standard:	9W, 18W
	Halogen (H):	8W, 12W, 20W, 35W
12V Sealed Beam	Standard (SB):	12W, 18W
	Halogen (SBH):	8W

ORDERING INFORMATION

MODEL	VOLTAGE	WATTS	HEAD TYPE	LAMP TYPE	OPTIONS
LX	6 (volt DC)	18 (6v)	3 = Triple PAR 36	See Lamp Selector	SD = Self Diagnostics
	12 (volt DC)	27 (6v)	2 = Double PAR 36		NC = NiCad Batteries
		36 (6v, 12v)	0 = No Heads		V = Voltmeter
		54 (6v, 12v)			A = Ammeter
		75 (6v, 12v)			TD = Time Delay (Specify Volt)
		100 (6v, 12v)			ERT = Extended Run Time
					BL = Black Housing
					WG = Wire Guard
					3CP = Cord Set

Ordering Example: LX-12-100-2-12VSBH-8W-SD