

# BAL650C-2

## FLUORESCENT EMERGENCY BALLAST 650 LUMENS

STANDARD



LED Test switch included.

EMERGENCY BACKUP

### ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 650 lumens.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Suitable for installation inside, on top or in remote\* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

### HOUSING


- Durable painted steel construction in white finish.
- Provided with 2' flex conduits on both ends.
- Compact design fits most fluorescent fixtures.

### WARRANTY / LISTING


- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0° C – 50° C).

### LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one 13W-26W, 2-pin compact fluorescent lamps with also G23, GX23, and G24D bases. Refer to lamp compatibility chart below for a complete list of lamps.



### DIMENSIONS

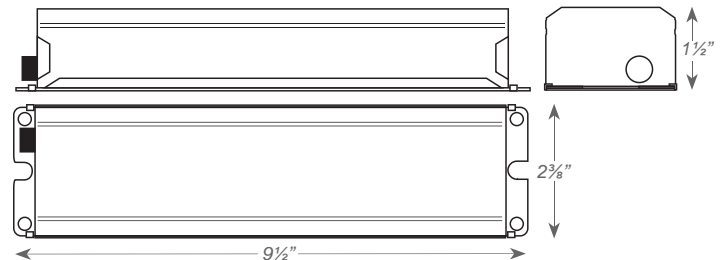

BAL650C-2

### LAMP COMPATIBILITY CHART

\* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

LAMP	INITIAL LUMENS
	1-LAMP
2-Pin PL CF 13W	380
2-Pin PL CF 18W	550
2-Pin PL CF 26W	650