



# EVR Series

## Architectural LED Emergency Light

### FEATURES

The EVR LED remote offers compact architectural design which matches the EV LED unit in size and performance. The use of a EVR2 remote doubles the multiple unit spacing, cuts down on AC wiring requirements and can be installed up to 50' from the EV unit. The EVR LED remote accepts DC input from an EV emergency light or EVC-D4 combo with remote capacity. The EVR2 is illuminated by 2 LED lamp-heads which are fully adjustable. The housing is made of UV stable thermoplastic with a light texture. The EVR matches the EV unit and EVC combo in color and texture. Available in White or Black finish. The EVR remote can be wall or ceiling mounted by use of a molded-in template and wired through the back-plate or conduit entry.

#### Input Power Requirements

4.8 Vdc at 2 watts provided from the EV4D emergency light or EVC-D4 combo with remote capacity

#### Specific LED information

Lamp Color: Cool White

Total Lamp Output: 88 Lumens per LED

System Efficacy: 80lm/W

Rated LED Lamplife: Greater than 100,000 hrs.

#### Warranty

LED Lifetime Warranty

EVR Full 3 year warranty

# Remote Lighting Heads


Catalog Number	
Comments	Type



Patents Pending

**Caution: The EVR2 remote can only accept input power from the EV4D or EVC-D4 with remote capacity. The EVR2 will not work with any other emergency units.**

### ORDERING GUIDE

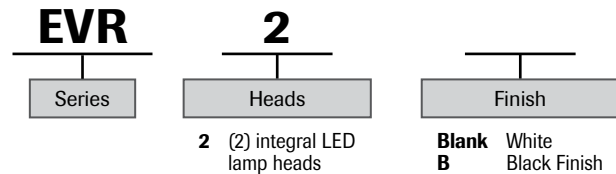

# EVO Series

## Outdoor LED Remote

### FEATURES

The EVO outdoor LED remote is a single or double head LED based remote which accepts DC input from an EV emergency light or EVC-D4 combo with remote capacity. The EVO is best utilized as an over the door path of egress light for emergency operation. The EVO uses a single 3 watt rated LED per lamp-head and can be located up to 50' from the external power source. Available in white or black corrosion resistant finish. Lamp housing and mounting plate are made of durable die-cast aluminum.

#### Input Power Requirements

4.8Vdc at 1 watt per head provided exclusively from an EV4D emergency light or EVC-D4 combo with remote capacity

#### Specific LED information

Lamp Color: Cool White

Total Lamp Output: 88 Lumens per head

System Efficacy: 80 Lumens per LED

Rated LED Lamplife: Greater than 100,000 hrs.

#### Warranty

LED Lifetime Warranty


EVO Full 3 year warranty

Catalog Number	
Comments	Type



**Caution: The EVO remote can only accept input power from the EV4D emergency light or EVC-D4 combo. The EVO will not work with any other emergency units.**

### ORDERING GUIDE

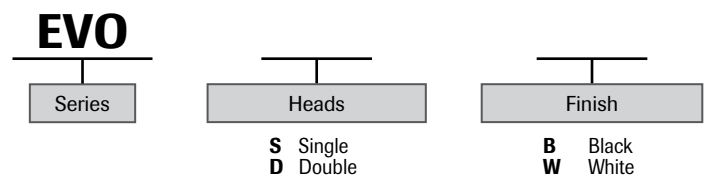



# Remote Lighting Heads

## PGR *PGR High Performance LED Remote*

Catalog Number	
Comments	Type

### FEATURES

The PGR offers LED performance in a remote fixture. Architectural style for indoor or outdoor application. The unit is illuminated by 4 high power LED's arranged so that in the event of 1 or 2 LED failures the unit will continue to operate. The PGN accepts DC voltage which must be supplied from an external 6-12V DC emergency lighting unit. Housing and mounting plate are constructed of 1/8" die-cast aluminum and sealed with a 1/8" closed-cell silicone gasket. Housing finish is powder coated electro-deposition paint available in four colors: dark bronze, white, platinum silver and black. Remote can be wall-mounted by use of a universal molded-in template. Wired from the j-box through the back or through a conduit entry at the top.

#### Input Power Requirements

12 watts at 6vDC, 13 watts at 12vDC

#### Specific LED information

Lamp Color: neutral White, 4000K

Color Rendering Index(CRI): 75

Total Lamp Output: 445 Lumens min. Initial

LED Lamplife: 48,000 hrs. at 70% of Initial

U.S. Patent No. D627,916




White



Black

### ORDERING GUIDE




## LZ Series *Matching Remote Lighting Heads*

Catalog Number	
Comments	Type

### FEATURES

Architectural/commercial design. High performance MR-16 halogen lamps standard. Mounts to standard electrical boxes using universal mounting plate provided. Fixture housing mounts to back plate in a choice of four mounting positions. Housings secured using locking screws provided.

### ORDERING GUIDE

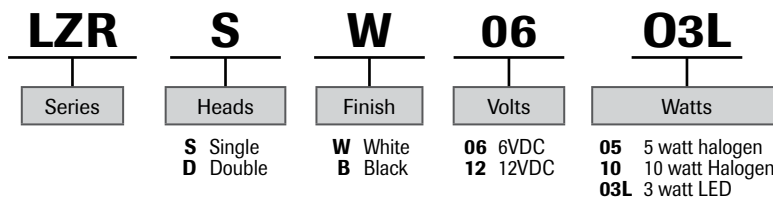



# Remote Lighting Heads

## CPR Series

### Decorative Indoor Remote Lighting Heads

#### FEATURES

Injection molded thermoplastic decorative lamphead and mounting plate assembly. Mounts to 3½" octagonal or single gang boxes. Single and twin lamp fixtures with MR16 lamp included. Standard finish is available in white or black.

#### ORDERING GUIDE

CPR	S	W	O3L
Series	Heads	Finish	Lamp
	S Single D Double	W White B Black	0605 6 Volt, 5 Watt Halogen 0603L 6 Volt, 3 Watt LED 1203L 12 Volt, 3 Watt LED

Catalog Number	
Comments	Type



## OCR Series

### Decorative Outdoor Remote Lighting Heads

#### FEATURES

Outdoor UL Wet Location Listed die cast aluminum lamp head and mounting plate assembly complete with MR 16 lamp. Single or twin lamp fixtures available in dark bronze, black or white polyester powder coat finish. Mounts to 3½" octagonal or single gang boxes. Available with 5 watt lamps. Housing rated up to 50 watts. Lamps higher than 5 watts supplied by others.

#### ORDERING GUIDE

OCR	S	W	O3L
Series	Heads	Finish	Lamp
	S Single D Double	W White B Black Z Dark Bronze	0605 6 Volt, 5 Watt Halogen 0603L 6 Volt, 3 Watt LED 1203L 12 Volt, 3 Watt LED

Catalog Number	
Comments	Type





# Remote Lighting Heads

## SRH Series Standard Remote Lighting Heads

Catalog Number	
Comments	Type

### FEATURES

Injection molded thermoplastic lamphead/round mounting plate assemblies. Mounts to 3 1/2" octagonal or single gang boxes. For use with most commercial or industrial emergency fixtures. Standard finish is available in white or black. Single and twin lamp fixtures with a choice of incandescent or halogen PAR 36 lamps.



### ORDERING GUIDE

SRH	S	W	0620
Series	Heads	Finish	Lamp
	S Single D Double	W White B Black	<b>0605</b> 6 volt, 5.4 watts Incandescent <sup>1</sup> <b>0607</b> 6 volt, 7.2 watts Incandescent <sup>1</sup> <b>0608</b> 6 volt, 8 watts Halogen <b>0612</b> 6 volt, 12 watts Halogen <b>0618</b> 6 volt, 18 watts Incandescent <b>0620</b> 6 volt, 20 watts Halogen <b>0625</b> 6 volt, 25 watts Incandescent <b>1207</b> 12 volt, 7.2 watts Incandescent <sup>1</sup> <b>1208</b> 12 volt, 8 watts Halogen <b>1212</b> 12 volt, 12 watts Halogen <b>1218</b> 12 volt, 18 watts Incandescent <b>1225</b> 12 volt, 25 watts Incandescent <b>1235</b> 12 volt, 35 watts Incandescent <b>2409</b> 24 volt, 9 watts Incandescent <sup>1</sup>

<sup>1</sup>Sealed Beam Type Lamp

## OMS Series Outdoor Remote Lighting Heads

Catalog Number	
Comments	Type

### FEATURES

Outdoor aluminum spot with sealed lamp and swivel assembly. Furnished with round gasketed aluminum mounting plate. Mounts to 3 1/2" octagonal boxes.



### ORDERING GUIDE

OMS	S	W	0620
Series	Heads	Finish	Lamp
	S Single D Double	W White B Black	<b>0605</b> 6 volt, 5.4 watts Incandescent <sup>1</sup> <b>0607</b> 6 volt, 7.2 watts Incandescent <sup>1</sup> <b>0608</b> 6 volt, 8 watts Halogen <b>0612</b> 6 volt, 12 watts Halogen <b>0618</b> 6 volt, 18 watts Incandescent <b>0620</b> 6 volt, 20 watts Halogen <b>0625</b> 6 volt, 25 watts Incandescent <b>1207</b> 12 volt, 7.2 watts Incandescent <sup>1</sup> <b>1208</b> 12 volt, 8 watts Halogen <b>1212</b> 12 volt, 12 watts Halogen <b>1218</b> 12 volt, 18 watts Incandescent <b>1225</b> 12 volt, 25 watts Incandescent <b>1235</b> 12 volt, 35 watts Incandescent <b>1250</b> 12 volt, 50 watts Incandescent

<sup>1</sup>Sealed Beam Type Lamp



# Remote Lighting Heads

## AHD

### All Metal Remote Lighting Heads

#### FEATURES

Stamped aluminum housing with metal swivel. Standard finish available in white or black. Choice of incandescent or halogen PAR 36 lamps.

#### ORDERING GUIDE

AHD	S	W	0620
Series	Style	Finish	Lamp
	<b>S</b> Single <b>D</b> Double	<b>W</b> White <b>B</b> Black	<b>0605</b> 6 volt, 5.4 watts Incandescent <sup>1</sup> <b>0607</b> 6 volt, 7.2 watts Incandescent <sup>1</sup> <b>0608</b> 6 volt, 8 watts Halogen <b>0612</b> 6 volt, 12 watts Halogen <b>0618</b> 6 volt, 18 watts Incandescent <b>0620</b> 6 volt, 20 watts Halogen <b>0625</b> 6 volt, 25 watts Incandescent <b>1207</b> 12 volt, 7.2 watts Incandescent <sup>1</sup> <b>1208</b> 12 volt, 8 watts Halogen <b>1212</b> 12 volt, 12 watts Halogen <b>1218</b> 12 volt, 18 watts Incandescent <b>1225</b> 12 volt, 25 watts Incandescent <b>1235</b> 12 volt, 35 watts Incandescent <b>1250</b> 12 volt, 50 watts Halogen
<b>2407</b> 24 volt, 7.2 watts Incandescent <sup>1</sup> <b>2413</b> 24 volt, 13 watts Incandescent <sup>1</sup> <b>2418</b> 24 volt, 18 watts Incandescent <sup>1</sup> <b>2428</b> 24 volt, 28 watts Incandescent <sup>1</sup>			

<sup>1</sup>Sealed Beam Type Lamp

Catalog Number	
Comments	Type



## GNX Series

### Environmental Lighting Heads

#### FEATURES

Moisture resistant thermoplastic head in black finish with coated lamp terminals and sealed swivel assembly. Furnished with mounting plate. Available with a choice of incandescent or halogen PAR 36 lamps. Matches N4X series units.

#### ORDERING GUIDE

GNX	S	B	0620	W
Series	Style	Finish	Lamp	Options
	<b>S</b> Single <b>D</b> Double	<b>B</b> Black	<b>0607</b> 6 volt, 7.2 watts Incandescent <sup>1</sup> <b>0608</b> 6 volt, 8 watts Halogen <b>0612</b> 6 volt, 12 watts Halogen <b>0618</b> 6 volt, 18 watts Incandescent <b>0620</b> 6 volt, 20 watts Halogen <b>0625</b> 6 volt, 25 watts Incandescent <b>1208</b> 12 volt, 8 watts Halogen <b>1209</b> 12 volt, 9 watts Incandescent <sup>1</sup> <b>1212</b> 12 volt, 12 watts Halogen <b>1218</b> 12 volt, 18 watts Incandescent <b>1225</b> 12 volt, 25 watts Incandescent <b>1235</b> 12 volt, 35 watts Incandescent	<b>L</b> Shatter Containment <sup>2</sup>

<sup>1</sup>Sealed Beam Type Lamp

<sup>2</sup>Not available on Sealed Beam Type Lamps

Available with shatter containment option. Add "-L" to model number for Sealed Beam Lamps PAR36 only. Example: GNXSB0625-L

Catalog Number	
Comments	Type





# Remote Lighting Heads

## C1D2R/C1D2TR

### FEATURES

Suitable for wet and damp location applications. Rated for NEC Class I, Division 2, Groups B, C and D as well as Class I, Zone 2, Group IIB + H2 environments. Black housing and head assemblies. Single (C1D2R) and twin (C1D2TR) head models.

### ORDERING GUIDE

MODEL NUMBERS		LAMPS*	
SINGLE HEAD HUB LEFT SIDE <sup>1,2</sup>	TWIN HEAD HUB LEFT SIDE <sup>1,2</sup>	VOLTS	WATTS
C1D2R-6V8W	C1D2TR-6V8W	6	8
C1D2R-6V12W	C1D2TR-6V12W	6	12
C1D2R-12V8W	C1D2TR-12V8W	12	8
C1D2R-12V12W	C1D2TR-12V12W	12	12

\* PAR 36 Halogen sealed beam lamps.

<sup>1</sup>Hub Right Side — add "R" to end of model number. Example C1D2R-6V8WR.

<sup>2</sup>Hubs Both Sides — add "F" to end of model number. Example C1D2R-6V8WF.

Catalog Number	
Comments	Type



3R Listed

Replacement lamp part numbers and photometrics are available on the web at [www.dual-lite.com](http://www.dual-lite.com).

**Dual-Lite • [www.dual-lite.com](http://www.dual-lite.com)**

A Hubbell Lighting, Inc. brand with representatives' offices in principal cities throughout North America.

Copyright © Hubbell Lighting, Inc., All Rights Reserved • Specifications subject to change without notice. • Printed in U.S.A.



**HUBBELL  
Lighting**

0602008 F 10/13