



## Quickie "XQ" Series

### Universal Mount LED Exit Sign

### Thin, Sleek and Economical

### Sealed Maintenance-free Nickel-Cadmium Battery

### AC-Only, AC/DC or Self-Powered

### Evaluated to UL 924 Standard

The Quickie is a versatile exit sign, featuring an all-in-one design that uses the same compact housing for both AC, AC/DC and Self-Powered models.

## FEATURES

### Reliability

The Quickie "XQ" series has a five-year full warranty.

### Unit Data

The exit sign housing is constructed of high impact, scratch and corrosion resistant engineering grade thermoplastic material; available in mist-white or black. The design incorporates a "snap in" canopy for top or end mount, (virtually tool free installation), universal faceplate with selectable chevrons and backplate.

The light source of the exit sign will be red LED technology (ALINGAP), which will provide a uniform illumination on the legend. Damp location listing is optional. Batteries provide 90 minutes of emergency operation.

### Circuitry

Fully integrated circuitry includes a 2-wire 120-277Vac AC voltage input regulator, as well as an automatic, constant-current battery charger with solid-state transfer and AC-LED monitor and test switch.

### Power Requirements

Universal voltage, 2-wire input 120/277Vac, 50/60Hz

## DIAGNOSTIC/SELF-TEST FEATURE (optional)

The self-test/diagnostic feature continuously monitors the charger assembly, battery and LED assembly current. If a fault is indicated, the external service required indicator will illuminate. The internal fault indicators will then indicate the nature of the fault. The self-test/diagnostic will self test for 30 seconds every 30 days, 30 minutes every 60 days and 90 minutes annually. Meets NFPA 101 Life Safety Code requirements for periodic testing (Self-Powered Master Exit only).

## OPTIONS

### (Add Suffix to Model No.)

	Suffix
AC/DC Remote (6-24Vdc).....	-DC
Self/Diagnostic Test (Self-powered only).....	-D
Dual Circuit (AC units only).....	-2
Vandal Resistant Screws.....	-VR
Vandal Resistant Lexan Face Shield.....	-LVR
Flasher/Buzzer (Self-powered only).....	-FB
Damp location listing.....	-DL
Open Face/Special Wording.....	-Y

## ACCESSORIES


### (Order as a separate item)

Black Pendant .....	P*-BK
White Pendant.....	P*-WT
Wire Guard (wall mount) .....	WG1
Wire Guard (ceiling or end mount).....	WG5

\*Specify pendant length (12", 24", 36" etc.)



## DIMENSIONS

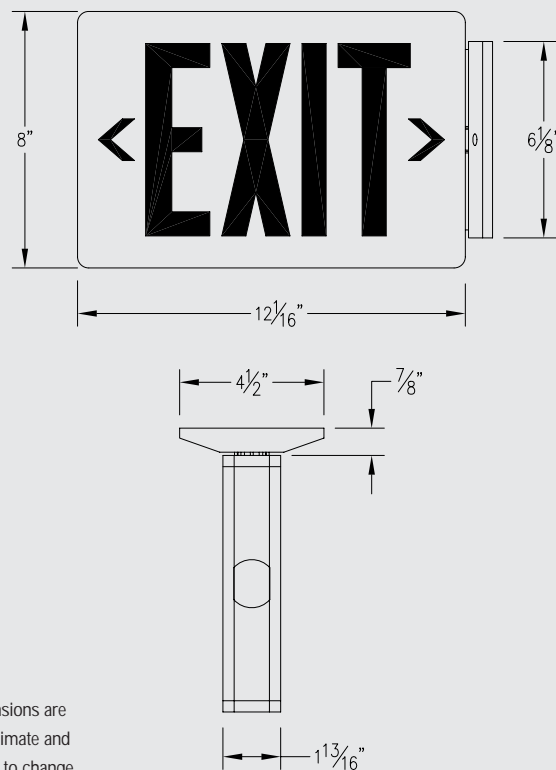

Dimensions are approximate and subject to change

## POWER CONSUMPTION CHART

Model	AC Specs		DC Specs	
AC-only	120 to 277Vac	1.6W	-	-
AC/DC	120 to 277Vac	1.6W	6 to 24 VDC	Less than 1.5 W
Self-powered	120 to 277Vac	2.2W	NiCad battery	Min. 90 minutes

## ORDERING FORMAT

	U	XQELR	-D
Color			
Blank= White			
B= Black			
Series	U=Universal 2 faces and canopy	Series XQLR= AC Only Red XQELR=Self Powered Red XQLG=AC Only Green XQELG=Self Powered Green	Options Self/ Diagnostic Test