


MICRO EXIT SIGN SERIES

Thermoplastic Micro LED Exit Sign

Slim profile thermoplastic LED exit signs offer modern design including standard flat face plate, long lamp life, energy efficiency and uniform illumination in an economical package.



DIMENSIONS

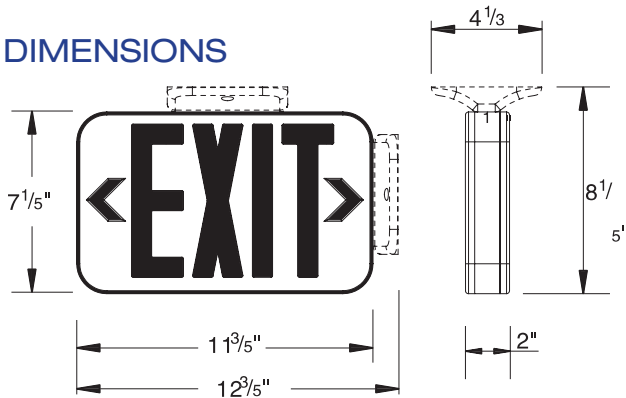

FEATURES

- Injection-molded, high impact, UL 94 V-0 thermoplastic
- Snap-together construction speeds installation
- Universal J-box pattern
- Universal mounting capabilities: top, back, or end mounting (canopy included)
- Universal chevrons are easily removed for directional indication
- Fully assembled single face with extra faceplate for easy field-conversion to double face
- White housing is standard, with an optional black housing available
- LED expected life is more than 10 years
- Vf (V) for lamp head LED is max. 3.6V, 20mA, max. wattage for the LED is 0.072W
- Dual-voltage input 120V or 277V AC operation
- Exit sign unit includes test switch
- Status indicator lamp
- Maintenance free sealed 3.6V Ni-Cad rechargeable battery which provides 90 minutes of emergency power
- UL 924 listed
- UL indoor damp location listed standard, 68°F (20°C) to 86°F (30°C)
- National Electrical Code (NEC)
- Five-year warranty

ELECTRICAL SPECIFICATIONS

Model	Current(mA)/Power(W)	
	@120VAC,60Hz	@277VAC,60Hz
PAC0433BXRX	19.8/1.78	8.8/1.88
PAC0433BXGX	19.4/1.49	8.7/1.57
PAC0433BXRXRC	44/3.6	37/4.14
PAC0433BXGXRC	43/3.28	36/3.81
PAC0433BXRXSD	30/3.0	14/3.1
PAC0433BXGXSD	33/3.3	16/3.4
PAC0433BXRXRCSD	25/2.8	11/2.8
PAC0433BXGXRCSD	27/3.0	12/3.0

ORDERING INFORMATION

Series	Operations	Number of Faces	Letter of Color	Housing Finish	Options	Function
PAC0433	<i>B</i> = Battery Backup <i>Blank</i> = AC Only	<i>1</i> = Single Face <i>2</i> = Double Face	<i>R</i> = Red <i>G</i> = Green	<i>W</i> = White <i>B</i> = Black	<i>Blank</i> = None <i>RC</i> = Remote Capability	<i>Blank</i> = Standard <i>SD</i> = Self Diagnostics

RUN TIME CHART OF REMOTE CAPABLE PAC0433

Remote Head QTY	0	1	2	3	4
Hrs of Operation	6 Hrs	2 Hrs	1.5 Hrs	N/A	N/A