



TYPE \_\_\_\_\_

CATALOG# \_\_\_\_\_

SPECIALTY PRODUCTS

### AL-500 Fluorescent Emergency Ballast

#### GENERAL DESCRIPTION

The AL500 emergency ballast allows the same fixture to operate in both emergency and normal operation. Automatic switching to emergency mode occurs, in the event of a power failure, operating one lamp for a period of 90 minutes. The battery, charger and inverter circuit are integral to this compact single housing ballast. Designed for wire way mounting or direct mount to top of fixture. Unit weighs approx. 2 lbs.

#### ILLUMINATION

Will operate most 2' -4' single, bi-pin T8 & T12 fluorescent lamps with an initial illumination of 500 lumens. (One Lamp)

#### ELECTRONICS

Dual Voltage 120/277 VAC @ 60Hz designed for cold start operation on all specified lamps. Input is 3.5 Watts. Automatic switching to emergency mode via integral battery, charger, and inverter circuitry which includes separate one piece indicator light and test switch.

#### DIMENSIONS


Length	9 1/2"
Width	2 3/8"
Height	1 1/2"
Mounting Center	9"

#### CODE COMPLIANCE


UL listed  
Meets or exceeds all NEC and Life Safety Code emergency lighting requirements.

#### WARRANTY

5-year replacement.

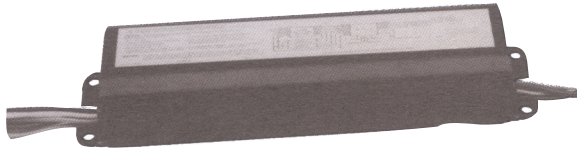

#### DIMENSIONS

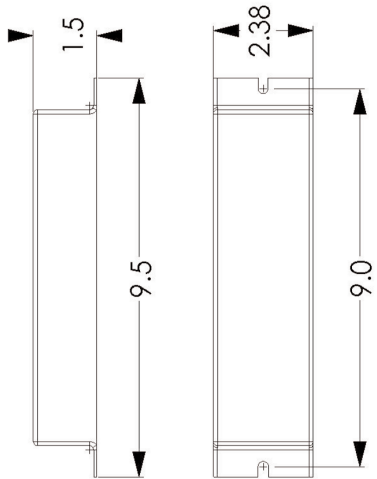

AL-500

Model Name

Model	500
Initial Lumens	500
Linear Lamps	
2'-4' Rapid, Instant energy saving T8-T12	1
20W-40W Circline	1

