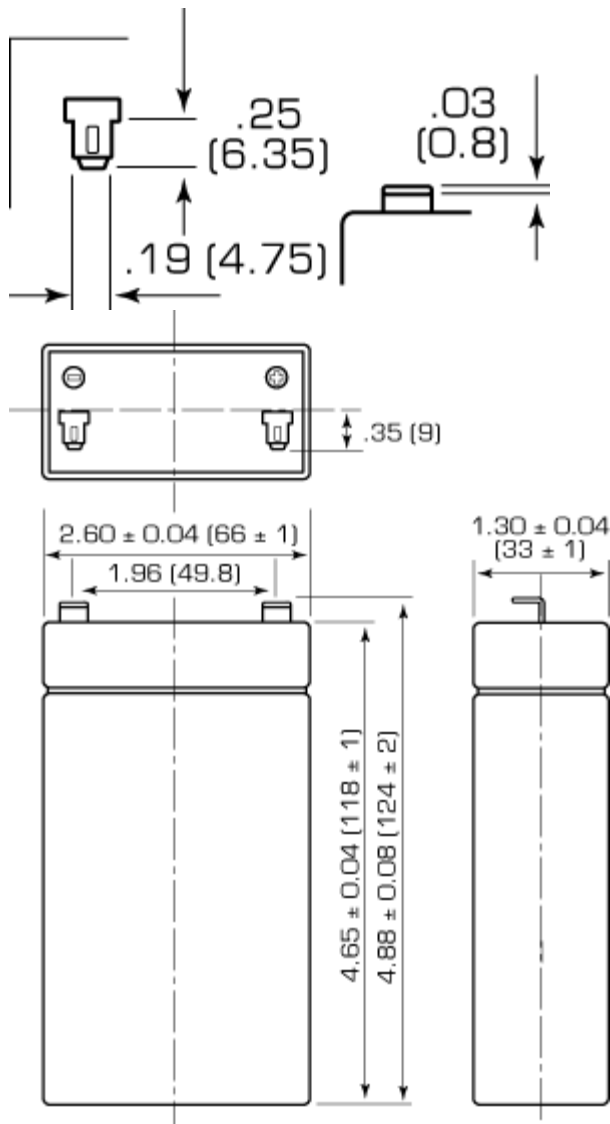


PE6V3.2**Dimensions****Rechargeable Sealed Lead Acid Battery****Specifications**

1	Nominal Voltage	6V
2	Nominal Capacity	0.05C (0.16A to 5.25V) 3.20 Ahr 0.1C (0.32A to 5.25V) 2.88 Ahr 0.2C (0.64A to 5.10V) 2.496 Ahr 1C (3.2A to 4.50V) 1.664 Ahr
3	Weight (Approx.)	1.54 lbs. (0.75 kg)
4	Internal Resistance of fully charged battery	25 milliohms
5	Energy Density (0.05C)	1.22 Watt-hours/cubic inch (74.7 Watt-hours/)
6	Specific Energy (0.05C)	12.6 Watt-hours/pound (27.8 Watt-hours/)
7	Maximum Discharge Current with standard terminals	19.2 amperes
8	Maximum Short Duration Discharge Current (less than 5 sec.)	49 amperes
9	Vibration Test	(2000 cycles/minute, 0.10 inch excursion, 2 hours) No loss in capacity or performance
10	Charge Retention (shelf life)	% of nominal capacity at 77°F (25°C) 1 month 97% 3 months 91% 6 months 85%
11	Operating Temperature Range	Charge 32°F (0°C) to 104°F (40°C) Discharge —4°F (—20°C) to 122°F (50°C) Storage —4°F (—20°C) to 104°F (40°C)
12	Case Material	Synthetic resin (ABS)
13	Standard Terminal	F1: AMP Faston type 187

CHARGING METHODS**CYCLIC USE:**

Maximum Initial Charge Current: 1.75A

Charging Voltage: 7.2V-7.35V


Charge should be switched to float mode or disconnected when current drops to 70mA

STANDBY USE:

Maximum Initial Charge Current: 1.75A


Charge Voltage: 6.75V-6.9V

Life Characteristics of Cyclic Use

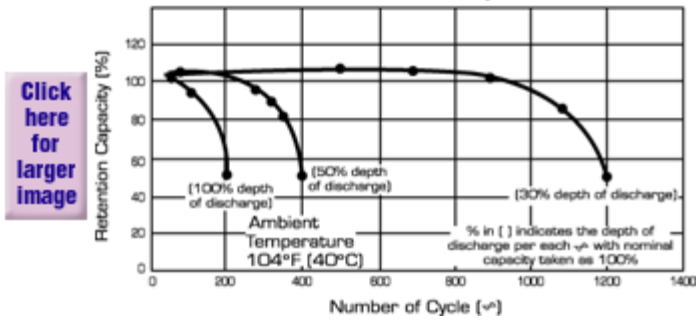


Click here for larger image

Shelf Life Characteristics

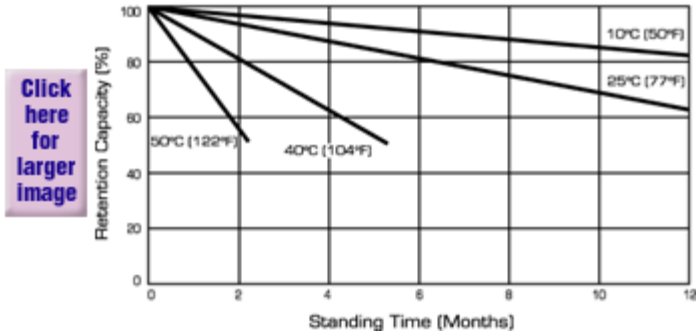


Click here for larger image

Effect of Temperature on Self-Discharge Rate

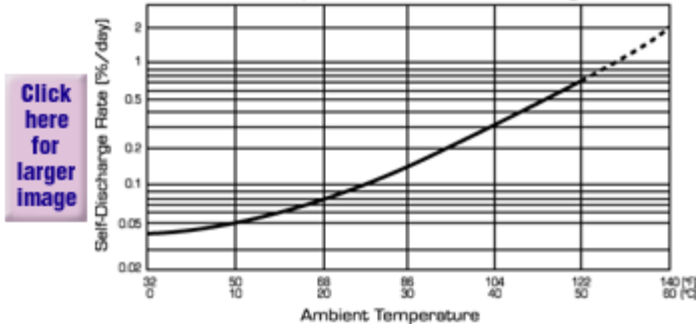

Click here for larger image

Effect on Temperature on Capacity

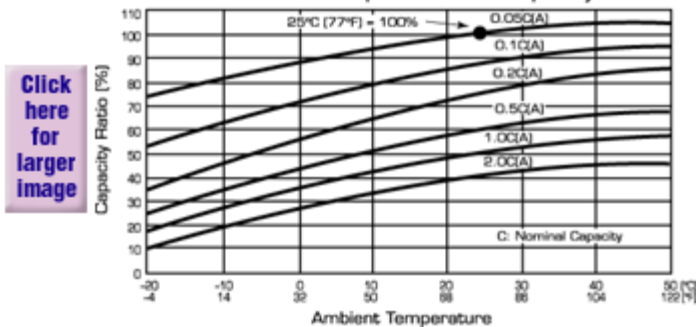

Click here for larger image