

VANDAL RESISTANT LED EXIT

The ROBO Series of LED vandal resistant exit signs is engineered to ensure optimal durability. Designed to stand up to abuse in applications such as schools, public areas, institutions and apartment complexes where vandalism may potentially occur. The 14 gauge steel and polycarbonate faceplate offers extreme protection and superior performance. Tamper-resistant screws ensure the integrity of the unit. The heavy gauge steel construction of the ROBO housing requires that directional chevron arrows must be specified when ordering. The ROBO Series is available configured with high-output LEDs in AC-only and Self-Powered operation versions.



BENEFITS & FEATURES

ALL MODELS


- Vandal resistant
- High-strength 14 gauge steel housing
- Impact-resistant 1/8" thick polycarbonate lens
- Secured with 4 tamperproof screws
- Heavy duty mounting canopy for ceiling and end mount applications (factory installed)
- Long-life LED lamps (Red or Green)
- Bright, even illumination
- Dual voltage 120/277 standard with surge protection
- ETL or CSA listed to UL924 standard

AC ONLY

- Total power consumption under 1.1 watts

SELF-POWERED

- Total power consumption under 4 watts
- Fully automatic, 90-minute operation
- Solid-state charger with low voltage disconnect
- Premium grade nickel cadmium battery
- AC lockout and brownout protection
- Charge rate/power on LED indicator light
- Push-to-test switch

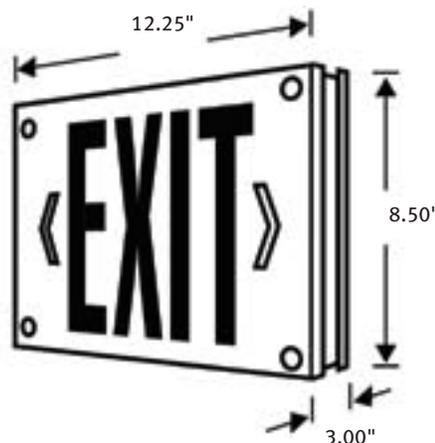

ORDERING INFORMATION

MODEL	# OF FACES	LETTER CLR	MOUNTING	CHEVRON DIRECTION	OPTIONS
RX = AC Only	1 = Single	R = Red	W = Wall (No Canopy)	NC = No Chevrons	SD = Self-Diagnostics
PRX = Battery Back Up	2 = Double	G = Green	C = Ceiling (Factory Installed)	LC = Left Chevron	FL = Flasher
			E = End (Factory Installed)	RC = Right Chevron	BZ = Buzzer
				LR = Left & Right Chevrons	SL = Special Lettering
					DLC = Dual Circuit
					PK12 = 12" Pendant Kit
					ERT = Extended Run Time

Ordering Example: PRX-1-R-C-LC-SD