



BENEFITS & FEATURES

ALL MODELS

- Rugged 20 gauge steel housing with baked enamel finish
- Diffused Super-bright LEDs – Red or Green
- Even illumination – no hot spots
- Dual voltage 120/277 standard
- Easy to install
- Eliminates maintenance – no more lamp changes
- Highly energy efficient
- Same compact frame for AC and Self-Powered models
- Universal ceiling, end or surface mount available
- Universal chevron knockouts
- Meets NFPA 101, NEC, OSHA, Energy Star® (Red)
- 5 Year Limited Warranty
- UL listed

AC ONLY (SX MODEL)


- Total power consumption under 2 watts

SELF-POWERED (PSX MODEL)

- Total power consumption under 5 watts
- Sealed maintenance-free nickel cadmium battery
- Solid state charger
- Low voltage disconnect & brownout protection
- LED AC pilot and “Ready” indicator monitors charging status
- Push-to-test switch

ENERGY STAR® LED EXIT

With appealing designs and dependable performance, the E-Star Series of LED exit signs will accommodate virtually any application. Designed for ease of installation, this versatile exit sign features an all-in-one design that uses the same compact housing for both AC and Battery-Backup models. The LED light source provides years of maintenance-free illumination at a minimal cost.

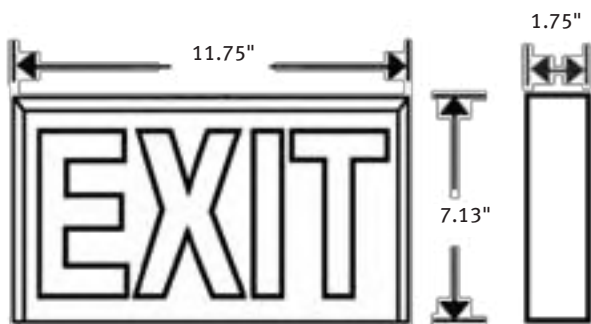

ACCESSORIES

ACCESSORY	DESCRIPTION
WG2	Wire Guard
PK12	Pendant Kit - 12"
VRS	Vandal Resistant Shield

Add suffix to model

ORDERING INFORMATION

MODEL	# OF FACES	COLOR CODE	OPTIONS
SX = AC Only	1 =Single with Canopy	WWR = Red Letters, White Housing	SD = Self-Diagnostics
PSX = Battery Backup	2 =Double with Canopy	WWG = Green Letters, White Housing	DLC = Dual Circuit
	1/2C =Universal (Double Face with Canopy & Back Plate)	BBR = Red Letters, Black Housing	SL = Special Lettering
		BBG = Green Letters, Black Housing	TP = Tamperproof Screws
		(Call for other combinations)	FL = Flasher
			BZ = Buzzer
			ERT = Extended Run Time

Ordering Example: PSX-1-WWR-VRS