

# BAL700LPACTD

## LOW PROFILE FLUORESCENT EMERGENCY BALLAST 700 LUMENS

STANDARD



LED Test  
switch included.

### ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 700 lumens.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- AC output ensures compatibility with newer lamp technologies and helps prolong lamp life.
- Time delay enhancement to overcome end-of-life circuit protection.

### MOUNTING

- Suitable for installation inside, on top or in remote\* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

### HOUSING


- Low profile galvanized steel construction.
- Compact design fits most fluorescent fixtures.

### WARRANTY / LISTING


- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

### LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one 14W-39W T5/T5HO, one 17W-40W T8 through T12, one 13W-26W 4-pin compact or one 18W-50W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

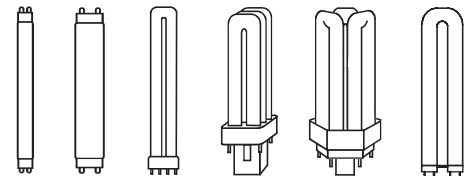

### DIMENSIONS

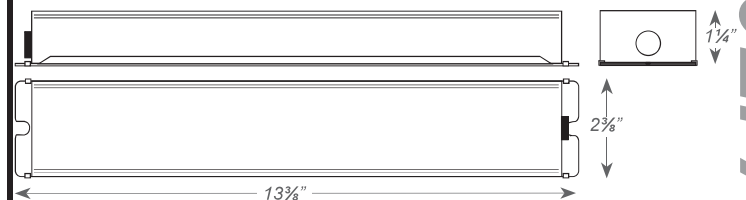

LAMP	INITIAL LUMENS	LAMP	INITIAL LUMENS	LAMP	INITIAL LUMENS
	1-LAMP		1-LAMP		1-LAMP
T5 14W	550	T12 20W	625	4-Pin Long CF 18W	550
T5 21W	600	T12 40W	675	4-Pin Long CF 24W	575
T5 28W	625	4-Pin PL CF 13W	475	4-Pin Long CF 36W	625
T5HO 39W	700	4-Pin PL CF 18W	500	4-Pin Long CF 40W	650
T8 17W	550	4-Pin PL CF 26W	600	4-Pin Long CF 50W	650
T8 32W	650				

\* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

BALLASTS  
BAL700LPACTD