



PYL12V180FT

12V 185Ah-8Hr



Proven in the real world, the PYL Series of telecom batteries provides security and long life in extreme climates where other VRLA batteries just don't survive. The PYL technology utilizes proprietary lead alloys and active material additives. The PYL Series is the most cost effective battery solution over the total life cycle and for initial installation in your network.

- Primary lead for Long Life
- UL94 V-0 flame retardant case
- High temperature, long life design
- AGM and spill-proof construction
- Harnesses/connecting bars available
- No maintenance required
- 10+ years design life
- SR-4228 compliant
- UL recognized
- ABS plastic case for durability

SPECIFICATIONS

* Maximum Charge Current is 25% of the 8 Hr. Rate

Nominal Voltage (V)	Rated Capacity Rate In Ah * 8 Hr	Ambient Temperature		Outer Dimensions								Weight		Terminal
		Charge / Discharge	Storage	L		W		H		TH		kg	lbs.	
				mm	in.	mm	in.	mm	in.	mm	in.			
12	185 Ah	-15 to 50°C (5 to 122°F)	-15 to 45°C (5 to 113°F)	556	21.9	125	4.9	317	12.5	317	12.5	60.7	133.8	Front-M8 Bolt

Amperes to Final voltage: 1.75V per cell @ 25°C (77°F)


DISCHARGE TIME (Hr)

2	3	4	5	6	7	8	9	10	12	20
71.2	52.0	41.3	34.4	30.0	26.0	23.1	21.0	19.3	17.7	10.2

Watts to Final voltage: 1.75V per cell @ 25°C (77°F)

DISCHARGE TIME (Hr)


2	3	4	5	6	7	8	9	10	12	20
829	609	487	407	351	315	275	250	232	215	123

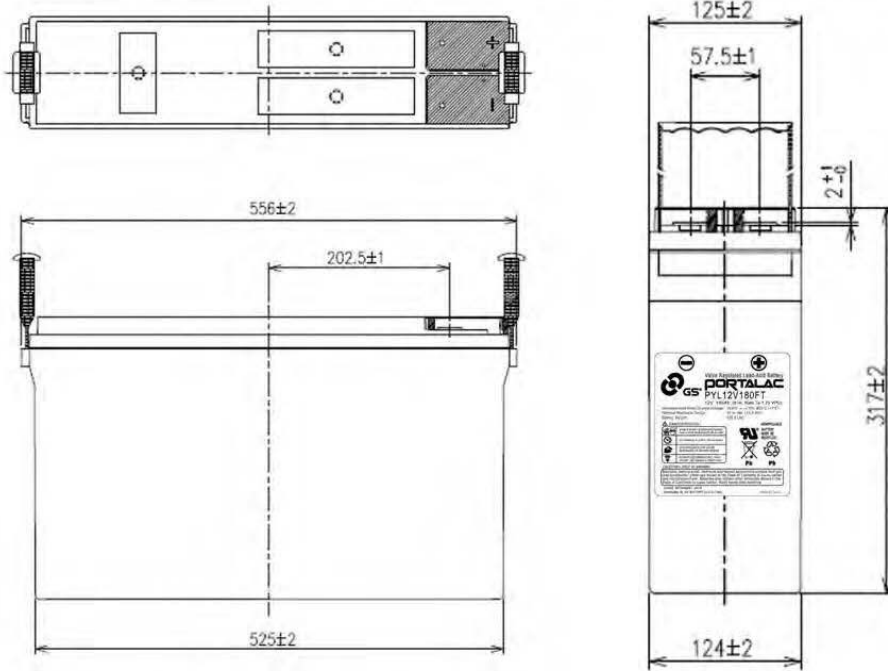


units: mm

- **Float Charge Voltage: 13.65V +/- 0.15V**
- **Temperature Compensation: The recommended compensation factor is -3mV/°C/cell. The standard center point for temperature compensation is 25°C.**
- **Internal Resistance: Approximately 3.5 mΩ measured with 1kHz AC bridge**
- **Terminal Torque: 90 in. lbs. (10.2Nm)**


Temperature and Discharge Capacity

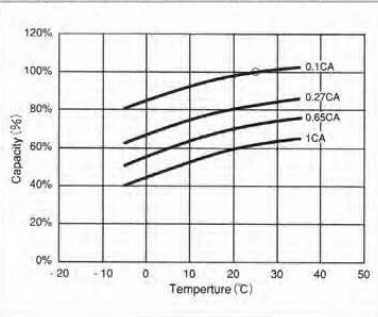

Self-discharge Characteristics

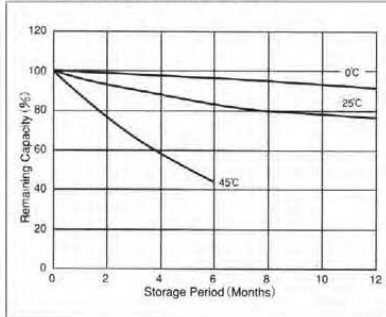

Charging Characteristics(2.275V/cell)

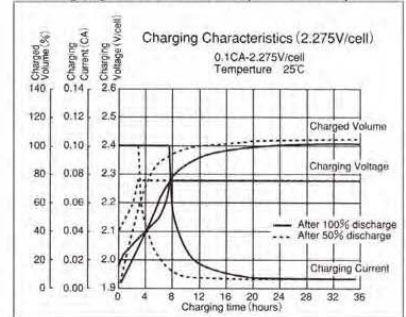

Emergency Lite Service Center
 2525 Nevada Ave N Suite #308
 Golden Valley, MN 55427
 Phone (763) 542-3155
 Toll Free 1-800-521-4045

E.L.S.C. is a distributor of
PORTALAC
Batteries

ISO 9001
 International Organization for Standardization
 SGS
UL
 International Certification
 (1).ISO 9001, TS16949
 (2).UL approval, Code:MH12970