

LOW-PROFILE EMERGENCY LIGHT

The Recessed Series of low-profile, decorative emergency lighting units combines a contemporary appearance with state-of-the-art electronics. These aesthetically pleasing units are the products of choice where a recessed installation is desired. Ideal for stores, hospitals, offices and school corridors. Units are designed for fast, easy, recessed installation in wall or ceiling.


BENEFITS AND FEATURES

- Completely self-contained
- Fully automatic, 90-minute operation
- Compact, low profile design
- Low voltage disconnect
- Dual voltage 120/277
- Premium grade, maintenance-free battery
- Provides a minimum emergency duration of 90 minutes
- Environmentally coated, solid state charger
- Standard with two fully adjustable, glare-free lamp heads
- Easy, recessed installation in wall or ceiling
- Housing constructed from durable 20 gauge steel
- Charge rate/power on LED indicator light
- Push-to-test switch
- Certified by ETL or CSA to UL924 standards



LAMP SELECTION

TYPE	OPTIONS	WATTS
6V Tungsten	Standard:	9W
	Halogen (H):	8W, 10W, 12W
6V Sealed Beam	Standard (SB):	9W, 12W
	Halogen (SBH):	12W
12V Tungsten	Standard:	9W
	Halogen (H):	12W
12V Sealed Beam	Standard (SB):	12W
	Halogen (SBH):	8W

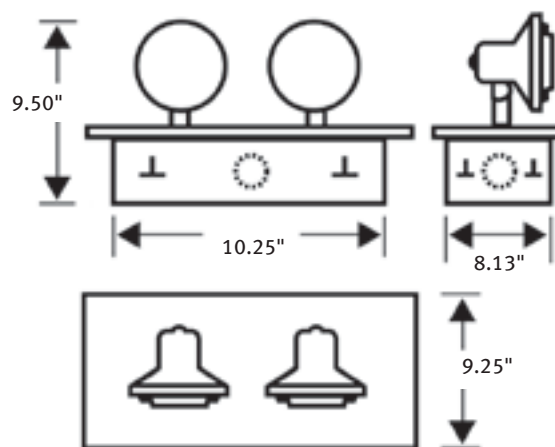

ORDERING INFORMATION

MODEL	VOLTAGE	WATTS	HEAD TYPE	LAMP TYPE	OPTIONS
REL	6 (volt DC)	18 (6v)	2 = Two Heads	See Lamp Selector	SD = Self-Diagnostics
	12 (volt DC)	27 (6v)	0 = No Heads		NC = NiCad Battery
		36 (6v, 12v)			TD = Time Delay (Specify Volt)
		54 (6v, 12v)			MRB = MR16 Bullet Heads
					PREM = Premium Package.
					Includes: SD, NC, TD, & MRB

Ordering Example: REL-6-27-2-6VSB-9W-SD