

EMERGENCY LIGHT

The Riparo offers Italian design, reliability and increased fixture to fixture performance. The use of fluorescent technology allows for an improved spread of light, fewer units to install and maintain and creates a safer environment during a power failure. The lens is clear by design, allowing the greatest amount of light to be dispersed. Designed for wall or ceiling installations.

**AUTO-TEST DIAGNOSTICS**

The Riparo is supplied standard with a fully configured auto-test feature that continually monitors the functional operation of the unit. The lamp, battery and circuitry are continually tested to ensure proper operation. A visual display alerts of any malfunctioning component.

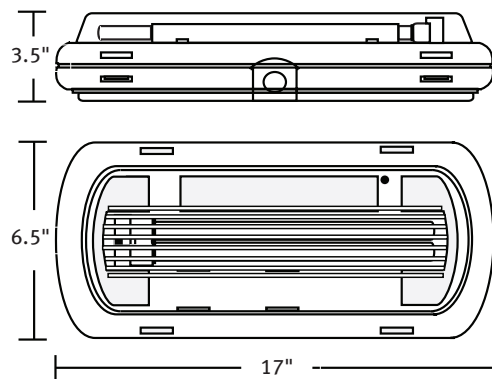
IP65/WET LOCATION GASKETING

The Riparo carries an IP65 / Wet location rating. Emergency units are especially vulnerable to fire sprinkler activation since emergency lighting units are often installed right next to sprinkler heads. The IP65 / Wet location rating ensures protection not just from ambient moisture but also from jets of water like those given off by broken or activated sprinkler heads

The Riparo unit incorporates a 24 watt compact fluorescent lamp with 1350 lumens during DC operation. The Riparo operates at 75% during emergency operations. This in turn, translates into energy efficiency, increased fixture spacing and lower installation costs.

BENEFITS & FEATURES

- Reflector is made of injection molded, self-extinguishing, UV stabilized polycarbonate
- Reflector supports components including the lamp holder and reflective hood
- UV stabilized to reduce the yellowing index and provide superior light output
- Housing is constructed from high quality corrosion, flame and vandal resistant polycarbonate
- Configured with universal 120/277VAC
- Surface or recess ceiling and wall mounting
- Suitable for wet location installations
- Incorporates an efficient high output lens and reflector
- Vandal resistant flush housing latch clips ensure integrity and discourage fixture tampering
- Fully configured auto-test feature
- High efficiency Ni-Mh batteries
- IP65 / Wet location rating
- 24 watt compact fluorescent lamp with 1350 lumens during DC operation
- 5-year factory warranty, lamps are not covered under the warranty
- ADA Compliant

**ORDERING INFORMATION**

MODEL	LAMPS	OPERATION	INPUT VOLTAGE	OPTIONS
RP	24 (1x24w CF fluorescent)	A = AC Only	UNV (120/277V)	NM = Ni-Mh batteries
		B = Emergency Only		RTD = Recess Trimplate Drywall
				RTT = Recess Trimplate T-Bar

Ordering Example: RP-24-B-UNV-NM-WH