

COOPER LIGHTING - SURE-LITES®

DESCRIPTION

The GC Series combines a clean, sleek contemporary appearance with state-of-the-art electronics. Specifically designed for initial and retrofit installations where a recessed unit is required to maximize aesthetics. The unit is ideal for locations with limited wall space, and where panoramic positioning is necessary for the ceiling mounted lampholders to provide proper light distribution. Ideal for stores, offices, hospitals and school corridors.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Electronic

- Dual Voltage Input 120/277 VAC, 60 Hz
- Line-latching
- Solid-state Voltage Limited Charger
- Solid-state Switching
- Low-Voltage Disconnect
- Brownout Circuit
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Lead Calcium, Recombination
- Maintenance-free, Long-life
- Full Recharge Time, 24 hrs. (max.)
- Polarized Battery Terminals
- Provides Minimum 2 Hour Emergency Illumination

Housing Construction

- 20-Gauge, Die-Formed Steel
- Knockout, Conduit or Cord Set
- Flanged for Mounting in Grid Type Suspended Ceilings
- Single Modular Electrical Connector
- White Finish

Code Compliance

- UL 924 Listed
- Life Safety NFPA 101
- NEC/OSHA
- Most state and local codes
- City of Chicago Approval No. 3238
- Plenum Rated/Chicago Plenum Mark (CECA-City of Chicago Environmental Air)

Warranty

- Unit: 1-year
- Battery: 5-year pro-rata



Head/Lamp

- Two Heads Standard
- Glare-Free Lens
- Fully Adjustable
- Remote Capability
- Metal Heads available in round or cylinder styles
- Halogen Lamps Standard
- Matches housing finish



GC SERIES

SUSPENDED CEILING
RECESSED HOUSING
6 VOLT
SEALED LEAD
CALCIUM BATTERY
CHICAGO CODE
EMERGENCY LIGHTING

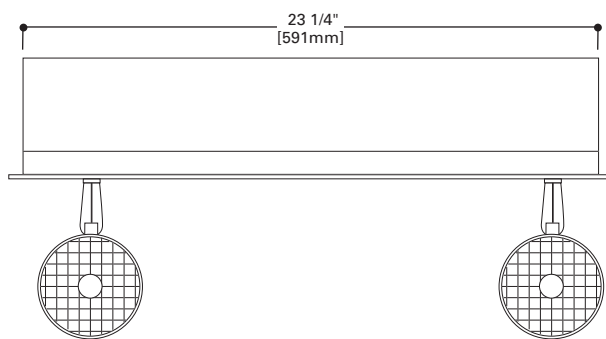

ELECTRICAL RATINGS

Model	Rated Wattage to 87 1/2% of Rated D.C. Voltage				Lamp Information		
	DC Voltage	2 Hours	3 Hours	4 Hours	Type	Wattage	Number
GC15072	6	24	18	14	Halogen	12	29-15
GC15072CL ¹	6	24	18	14	Halogen	12	29-15
GC15082	6	48	36	28	Halogen	12	29-15
GC15082CL ¹	6	48	36	28	Halogen	12	29-15

ORDERING INFORMATION

--	--	--

Series
GC15072
GC15082

Options ^{1, 2}
V= Voltmeter
SD= Self Diagnostics³
TDM= Time Delay Monitor

Accessories ⁴
Protective Housing
WG12= Wire Guard, Ceiling or Wall Mount
VK1= Voltmeter


- Notes:**
- 1 Consult your Cooper Lighting Representative for alternate lamps and additional options.
 - 2 Add as a suffix.
 - 3 GC15072, GC15072CL Only.
 - 4 Order separately.

TOTALLY PREDICTABLE
RELIABILITY

ENERGY DATA
GC15072, GC15072CL,
GC15082, GC15082CL
Input Current (Max.):
120V= .12A
277V= .05A


PHOTOMETRICS

Horizontal Distribution

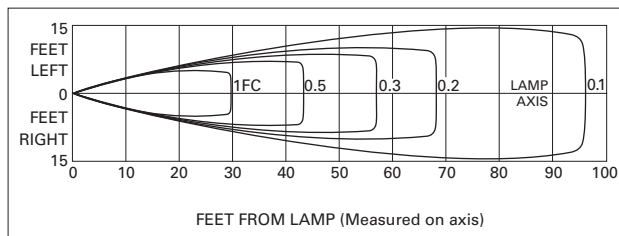

Lamp No. 29-15
Initial Lumens – 29-15 @ 302

Vertical Distribution

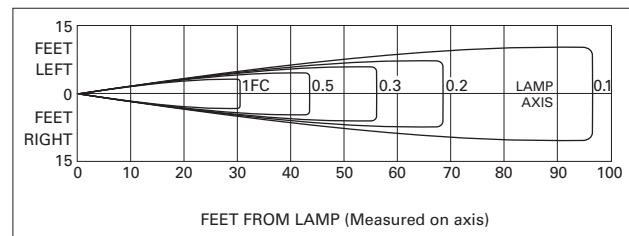

Lamp No. 29-15

TECHNICAL DATA

Heads

All metal formed aluminum lampheads available in round or cylinder styles. The die cast metal three dimensional swivel assembly permits approximate aiming adjustment from 80° vertical and 358° rotation. The placement is secured with a lockable pivot mounted on a rotating base ring.

Lamps

Designed specifically for emergency lighting applications, the PAR 36 sealed beam type design insures optimum glare - free light distribution along with horizontal and vertical adjustment by rotating the lens within the housing.

Housing

The rugged 20-gauge die-formed cold rolled steel housing is finished with white corrosion-resistant polyester powder coat paint. Cabinet has knockouts in side for AC/DC wiring connections. Removable full width cover provides easy above-ceiling access to batteries and electronics. Unit is UL Plenum Rated and includes a Chicago Plenum Mark (CEA-City of Chicago Environmental Air).

Line-Latched

Sure-Lites' line-latched electronic circuitry makes installation easy and economical. A labor efficient AC-activated load switch prevents the lamps from turning on during installation to a non-energized AC circuit. Linelatching eliminates the need for a contractor's return to a job site to connect the batteries when the building's main power is permanently turned on.

Solid-State Charger

Supplied with a 120/277 VAC, voltage regulated solid-state charger. Immediately upon restoration of AC current after a power failure, the charger provides a high charge rate. The charge circuit reacts to the condition of the battery and alters the rate of charge in order to maintain peak battery capacity and maximize battery life. Solid-state construction recharges the battery following a power failure in accordance with UL 924.

Overload and Short-Circuit Protection

The solid-state overload monitoring device in the DC circuit disconnects the lamp load from the battery should excessive wattage demands be made and automatically resets when the overload or short circuit is removed. This overload current protective feature eliminates the need for fuses or circuit breakers for the DC load.

Brownout Circuit

The brownout circuit in Sure-Lites' units monitors the flow of AC current to the unit and activates the emergency lighting system when a predetermined reduction of AC power occurs. This dip in voltage will cause most ballasted fixtures to extinguish causing loss of normal lighting even though a total power failure has not occurred.

Solid-State Transfer

The unit incorporates a solidstate switching transistor which eliminates corroded and pitted contacts or mechanical failures associated with relays. The switching circuit is designed to detect a loss of AC voltage and automatically

energizes the lamps. Upon restoration of the AC power, the emergency lamps will switch off and the charger will automatically recharge the battery.

Low-Voltage Disconnect

When the battery's terminal voltage falls below 80% of the rated voltage, the low-voltage circuitry disconnects the lighting load. The disconnect remains in effect until normal utility power is restored, preventing deep battery discharge.

Test Switch/Power Indicator Light

Conveniently located Test Switch allows for manual verification of proper operation of the transfer circuit and emergency lamps. The Power Indicator Light provides visual assurance that the AC power is on.

Sealed Lead Calcium Battery

The fully sealed, long-life, maintenance-free lead calcium battery is ideal for emergency lighting applications. These recombinant cycle batteries typically provide eight to ten years of life and may be operated in any position.

Warranty

All Sure-Lites' units are backed by a firm one-year warranty against defect in material and workmanship (excluding lamps). Maintenance-free, long-life, sealed lead calcium batteries carry a five-year pro-rata warranty.