




Combination Series - SQ

SQRXU/SQGXU Thermoplastic LED Exit Sign
Combo Exit/Emergency Light



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

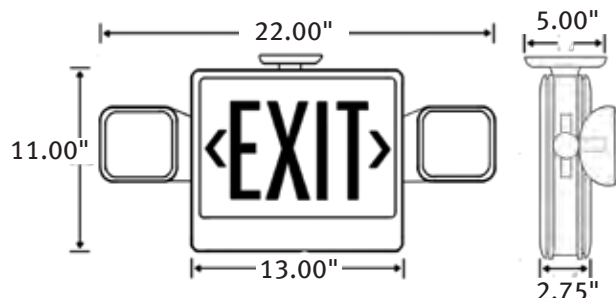

PRODUCT DESCRIPTION

The distinctive Square Lighting Heads integrate visually with the overall exit sign to create the ideal Combination Emergency Exit/Light for commercial and industrial environments. The right choice when economy and flexibility are required.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Injection molded, engineering-grade, UV-stable thermoplastic. UL94V-0 flame rating – Impact, scratch, fade and corrosion-resistant – Durable unibody housing frame with reinforcing ribs and integral wiring channel – Snap-fit faceplate and backplate – Second faceplate included for double face applications – 6" letters with 3/4" stroke width – Full-size, 3/4" wide chevron directional indicators – Chevron directional indicators can be easily removed or reinserted as necessary – White or black textured finish.

ELECTRICAL

Dual voltage 120/277VAC – Rated for use in damp locations (except optional REM and SD versions) – Solid state charging and switching – Brownout protection – Battery low voltage disconnect – Overload and short circuit protection – AC power indicator and test switch.

LAMPS

Long life, energy saving LED lamps – LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED – Red or green LED/letters – Red signs consume less than 5 watts – Green signs consume less than 6.5 watts.

HEADS

Supplied with two 6V, 5.4W incandescent wedge base lamps. – Contemporary square head design – Heads rotate a full 270° in all directions for comprehensive lighting coverage.

BATTERY

Sealed, maintenance-free lead calcium – Standard battery will operate sign and two 5.4W heads for a minimum of 90 minutes in the event of a power outage – High Output version will operate the sign and two 5.4W heads plus an additional 11W remote load for a minimum of 90 minutes.

CODE COMPLIANCE


UL Listed – ETL Listed – CUL Listed – Damp location rated (except optional REM and SD versions) – NFPA 101 Life Safety Code compliant – NEC and OSHA compliant – Meets the State of Minnesota energy efficiency requirements.

WARRANTY

5-year warranty (see reverse for battery warranty). Product specifications subject to change without notice.

PHOTOMETRICS

6V, 5.4W Tungsten Wedge Base Lamp (ANSI 939), Square Head
(Replacement Lamp #939)

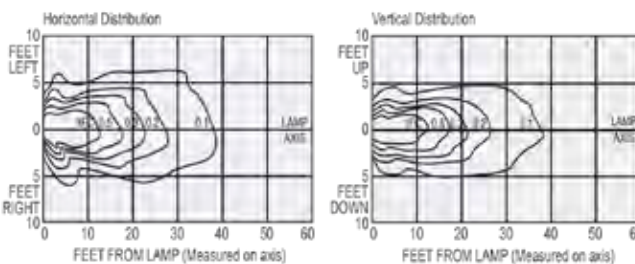

ENGINEERING DATA

	INPUT VOLTS	MAX. AMPS	MAX. WATTS	STANDBY WATTS*
Red LED	120	0.06	6.6	4.9
Red LED	277	0.03	6.9	4.4
Green LED	120	0.07	8.4	5.9
Green LED	277	0.04	9.0	6.2
Red LED-REM Option	120	0.12	14.3	4.4
Red LED-REM Option	277	0.06	14.7	4.4
Green LED-REM Option	120	0.13	14.7	4.4
Green LED-REM Option	277	0.06	14.9	4.4

* Fully charged battery.

INSTALLATION

MOUNTING

May be top or back mounted – All signs include quick-install snap-fit canopy and mounting hardware for easy top mount installation – Backplate includes universal mounting pattern knockouts for simple back mounting.

ORDERING INFORMATION

MODEL	DESCRIPTION	OPTIONS
SQRXU	Red Letters, Single or Double Face /w Canopy	BL = Black housing
SQGXU	Green Letters, Single or Double Face /w Canopy	SD =Self-Diagnostics
		REM = Remote Capable
		KL = 5.4 Watt Krypton Lamps

Ordering Example :SQRXU-REM

ACCESSORIES

ACCESSORY	DESCRIPTION
SQRM-1	Matching Single Remote Head
SQRM-2	Matching Double Remote Head
WG1	Wire Guard
VRS2	Vandal Resistant Shield

Add suffix to base model number or order separately