



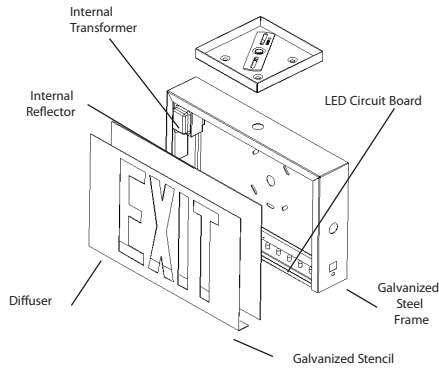

DIMENSIONS

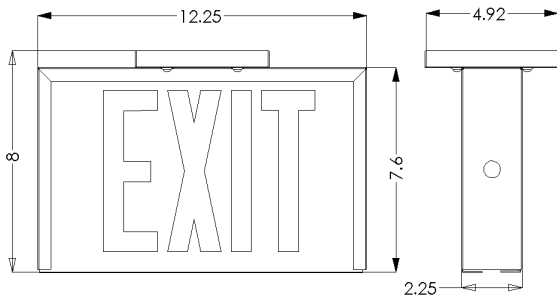

TYPE _____

CATALOG# _____

**ST SERIES
6 INCH STEEL LED EXIT SIGN**

GENERAL DESCRIPTION

The commercial series steel LED Exit Sign features rugged construction with low operating cost. Illumination is provided utilizing the highest quality LED's for precise evenly distributed trouble free illumination.

HOUSING

Rugged durable heavy gauge steel construction with polyester powder coat finish in your choice of white or black. Custom colors are available. Consult factory.

Face features include universal 3/4" directional chevron knockouts with 6" letters. Universal mounting is available for wall, end and ceiling. Pendants are also Available.

ILLUMINATION

Long lasting high output AlInGaP LEDs with minimum degradation over life of LEDs. Unit draws less than 2.5 watts and meets all Energy Star Requirements. Available in red or green.

ELECTRONICS

Input is dual volt standard 120/277 60Hz. Unit is damp location listed 50°-104°F (10°-40°C). EM option features solid state design with low voltage disconnect, brown out protection, and AC indicator LED with test switch. Battery is standard Nickel Cadmium.

CODE COMPLIANCE

UL 924 listed, NFPA, NEC, and OSHA illumination standard.

WARRANTY

5 years on housing and electronics with a 7 year pro rated warranty on the battery.

INDUSTRIAL SERIES

ST	Mounting	Letter Color	Housing Color	Unit Power Configuration	Factory Installed Options
Model					
1	Single Face Wall Mount	R Red G Green	W White B Black	AC AC Only	DI Dual Input Transformer SW Special Wording. 220 Consult factory 220VAC 50 HZ AC Input
1C	Single Face with Canopy			EM 90 Minute Operation During Power Failure	
U	Universal*				
UNIVERSAL INCLUDES CANOPY, 2 STENCILS, 2 DIFFUSERS, 1 BACK.					

