



TYPE \_\_\_\_\_

CATALOG# \_\_\_\_\_

TP-500 Remote Capable  
50/30 Watt Thermo Plastic MR-16  
Combination Unit

LIGHT STYLE™ SERIES



TP-500

GENERAL DESCRIPTION

The TP500 is uniquely contoured with a low profile, ideal for blending or enhancing any design. Unit is available in a full spectrum of colors including a vacuum metalized silver or gold finish. Designed for wall mount only, the TP500 is UL listed to 924 and can be provided with your choice of options including Self Diagnostics. Remote Capable for a total of 50/30 Watts max (including integral lamp wattage)

HOUSING

Thermo Plastic rugged construction provides style and durability to any application. The emergency unit features 2 fully-adjustable (360° rotation and 90° angle) MR-16 Halogen lamps with a maximum of 8 watts per. The slight radius design of the exit provides for a smooth sleek appearance blending with the attached emergency unit. Exit face design features 6" letters with directional chevrons.

ILLUMINATION

Two 5 watt ( 8 Watt Optional) 6V MR-16 Halogen lamps provide controlled even illumination. Long lasting high output ALInGaP LED's, with the highest performance and least degradation available in the market with a rated life of 10 years plus, illuminate the exit face (See chart on reverse side.)

ELECTRONICS & BATTERY

Standard Transformer Input is dual voltage 120/277 60Hz. Solid State charging system features (LVD) Low Voltage Disconnect, AC lockout installation and brown out protection and AC indicator LED light standard. The maintenance free sealed lead calcium battery provides a minimum of 90 minutes of illumination in emergency mode with an average life of 5 years. Optional Nickel Cadmium battery also available.


CODE COMPLIANCE

Tested and Listed to UL 924. Damp location listed standard. Meets or exceeds NFPA NEC and OSHA illumination standards.

WARRANTY

5 years on housing and electronics with a 5 year pro rated warranty on battery.

DIMENSIONS

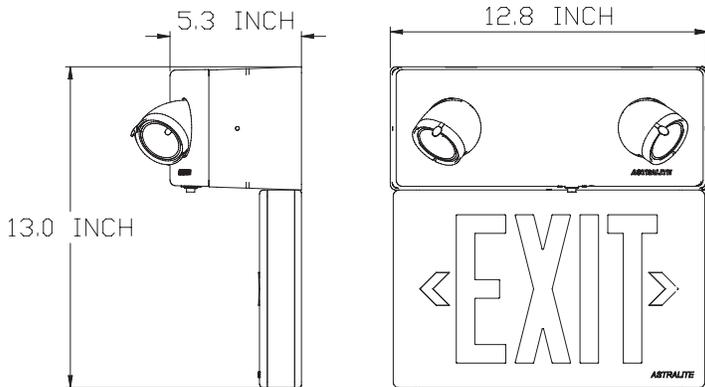

TP-500					
Model	Total Unit Watts	Exit Letter Color	Housing Color	Integral Lamps	Factory Installed Options
	30 watts 50 watts	R Red G Green	W White B Black	*10 (2) 5 Watt MR-16 16 (2) 8 Watt MR-16 *Standard	NC Nicad Battery 220 220 VAC Input SD Self Diagnostics

