

BENEFITS & FEATURES

ALL MODELS

- Wet Location/IP 65 rated
- Certified by CSA to UL924 standards
- Constructed of 0.420" heavy duty cast aluminum
- High abuse clear polycarbonate shield
- Tamper resistant hardware standard
- 120/277/347 VAC input
- Operating temperature of -30°F to +135°F
- Field selectable chevrons
- LED illumination consumes under 5 watts
- Conforms to UL924, NFPA 101, OSHA standards
- Suitable for wall, ceiling or end mounting
- 5 year warranty

SELF-POWERED MODELS

- Sealed nickel-cadmium batteries provide 90 minute run-time
- Self-diagnostics standard on battery models




WET LOCATION, VANDAL RESISTANT LED EXIT

The Pinnacle Series wet location, vandal resistant, LED exit sign combines an appealing design, the latest in die casting technology and high performance electronics to ensure reliability. Designed to stand up in high abuse areas such as parking garages, correctional facilities, schools, apartment complexes, and public areas that may be subject to vandalism and serious weather. Wet location/IP 65 rated, this exit is suitable for virtually any environment. The Pinnacle comes standard with self-diagnostic testing allowing for years of worry-free operation.



SELF-DIAGNOSTIC STANDARD ON ALL BATTERY MODELS

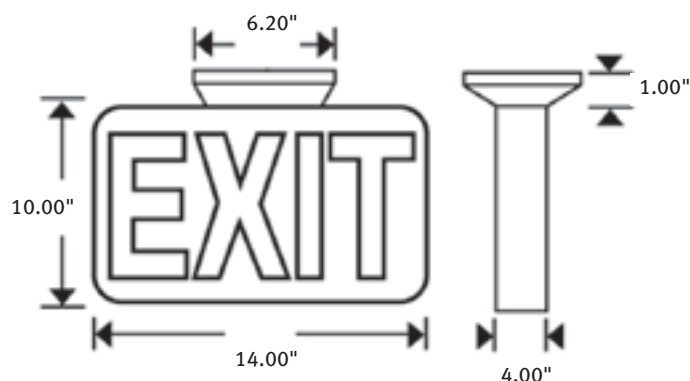

OPTIONS

OPTION	DESCRIPTION
PK12	12" pendant
FL	Flasher
BZ	Buzzer
SL	Special lettering
IH	Internal heater (specify voltage)
IR	Infrared remote test switch
ERT	Extended emergency operation

Add suffix to model

ORDERING INFORMATION

MODEL	# OF FACES	LETTER COLOR	HOUSING CLR	MOUNTING	STANDARD
WLCX = AC Only	1 = Single	R = Red Letters	B = Black	W = Wall (No Canopy)	SD = Self-Diagnostics
WLPCX = Battery Back-up	2 = Double	G = Green Letters	W = White	C = Ceiling (Factory Installed)	
				E = End (Factory Installed)	

Ordering Example: WLPCX-1-R-B-W-SD-IH277