

# ATLITE



## XPC3Contours

**Polycarbonate  
Combination Emergency  
and LED Exit Sign**


### EXIT LIGHTING

- Dual 120/277 VAC, 60Hz input
- Solid-state circuitry—no mechanical relay is used
- Output short-circuit and reverse polarity protected
- Transfer with AC line-latching
- Brownout protection
- Sealed, maintenance-free lead calcium battery
- Snap together, injection-molded plastic construction
- Focus-enhancing emergency lenses
- Contemporary styled, soft-corner design
- White and black finishes available
- Easily removed updated directional chevrons
- Variety of electrical and universal J-box mounting knockouts for easy installation
- Low-profile mounting canopy
- Meets or exceeds all current UL924 requirements, Life Safety Code, NFPA 101, NEC/OSHA and most state and local codes

### DESCRIPTION

The Atlite Contours XPC3 Combination LED Exit/Emergency Light features a soft-cornered, injection-molded thermoplastic exit and emergency housing. The exit sign is illuminated by a field-replaceable, high brightness LED illuminator strip. The emergency lighting power-pack has two integral PAR 18 incandescent heads, aimable in two planes, enclosed in focus-enhancing lenses. Once aimed, the lamps are secure from unauthorized tampering. The XPC3 can also be end-mounted, adding to its already versatile application flexibility, and aimed to provide effective illumination for safe egress. The Contours Series Combination Unit is available in red or green six inch letters. The series exceeds all applicable NEC and NFPA requirements; UL 924 listed.

### DIMENSIONS

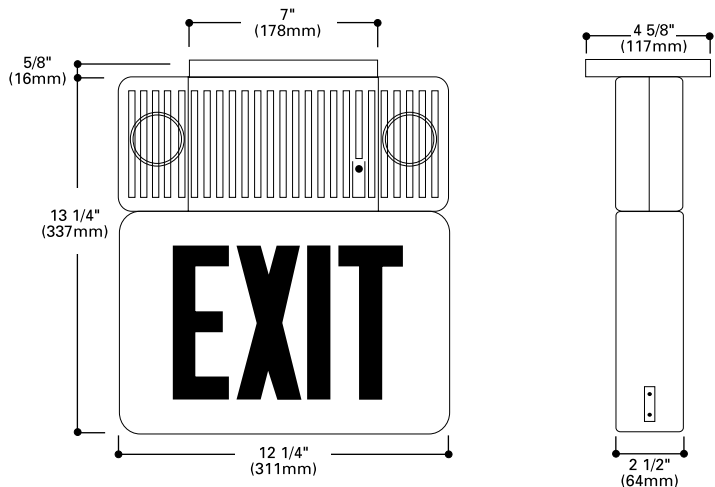

### ORDERING INFORMATION

Catalog Number	Operation	Letter Color	Number of Faces	Optional Finish
XPC3	Self-powered	R Red G Green	1 one face U universal, two faces with canopy and extra backplate	BLK Black

#### OPTIONS: Add to Catalog No.

Description	Code
Flasher (Emergency only) <sup>(1)</sup>	F
Buzzer (Emergency only) <sup>(1)</sup>	BZ
Flasher/Buzzer (Emergency only) <sup>(1)</sup>	FB
Flasher (On fire signal) <sup>(2)</sup> 12-48 Volt AC/DC or Dry Contact Control <sup>(3)</sup>	FA
Buzzer (On fire signal) <sup>(2)</sup> 12-48 Volt AC/DC or Dry Contact Control <sup>(3)</sup>	ABZ
Flasher/Buzzer (On fire signal) <sup>(2)</sup> 12-48 Volt AC/DC or Dry Contact Control <sup>(3)</sup>	FA/BZ

<sup>(1)</sup> Activated on utility failure

<sup>(2)</sup> Activated from fire signal or on utility failure

<sup>(3)</sup> 12-48 Volt AC/DC connection is *isolated*; Dry Contact must be user isolated

#### ACCESSORIES

Description	Code
Canopy Kits	
White	PCW
Black	PCB
6" Stem and canopy kit	
White	PSTW6
Black	PSTB6
12" Stem and canopy kit	
White	PSTW12
Black	PSTB12