

The **EC-2 and ECX-2 Series** offers complete flexibility in an emergency lighting unit. Units are 120/277 volt input and mount in any orientation. Snap-together design makes the EC Series easy to install.


UL Listed

Complies with NEC, Life Safety Code and OSHA.

Listed for use in Damp Locations

Sealed Maintenance-Free Batteries

- Lead Calcium

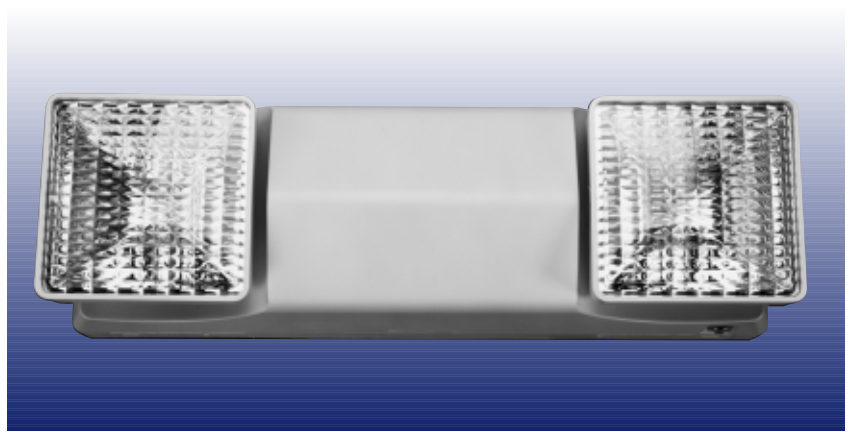

Standard Features

Reliability

The EC-2 and ECX-2 Series has a 3-year full warranty.

Unit Data


The EC-2 and ECX-2 are completely self-contained. Constructed of high impact, UL recognized, off white 94V-0 thermoplastic. 6 volt 5.4 watt high intensity incandescent lamps supply generous amounts of emergency lighting from the fully adjustable heads. The unit can also be mounted in any orientation. The units have a universal mounting pattern on the back and a conduit knockout on the top.

Reliable Integrated Circuitry:

Integrated circuitry offers 120/277 volt input standard, LED pilot light, automatic charging, instantaneous transfer, temperature compensated charger, low voltage battery disconnect, brownout protection, lockout (automatic battery connect) and reverse polarity protection.

Outline and Dimensions

Dimensions are approximate and subject to change.

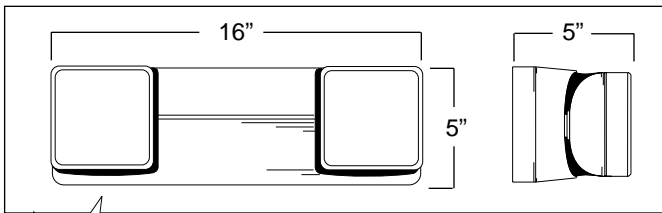

Combination Exit, Emergency Lighting Unit with 9 watt Remote Capacity



Factory assembled - combines the battery capacity of an ECX-2 with a matching Escort LED Exit Sign and a fused output to power up to 9 watts remote.

For single face back mounting applications only.

How To Order

- ECX-2-L1R** = Red stencil / 6 volt 5.4 watt incandescent heads
- ECX-2-L1G** = Green stencil / 6 volt 5.4 watt incandescent heads
- ECX-2-L1R (HA)** = Red stencil / 6 volt, 6 watt halogen heads
- ECX-2-L1G (HA)** = Green stencil / 6 volt, 6 watt halogen heads

ADD PREFIX

B= Black housing and heads

Flexibility in an emergency light unit

• On the specification...


Its contemporary design allows you to coordinate the aesthetics of emergency specifications with three matching models... an emergency unit... a remote head... and a 2-headed exit sign.

• On the job...

Changes on the job are never a problem with the EC Series. Its Modular design allows you to field upgrade the basic model to a master unit for powering matching remote lighting heads or AC/DC exit signs, including the new LED even illumination models.

• On the shelf...

The modular design of the EC Series gives you a contemporary family of decorative emergency light units, matching exit signs and remotes.

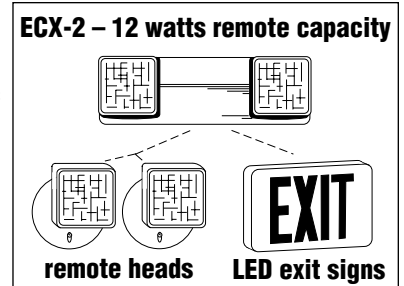

How To Order EC Series Units

	Model #
Standard unit.....	EC-2
Remote capability unit (12 watts remote)	ECX-2
EC-2 unit with 6 volt, 6 watt halogen lamps	EC-2 (HA)
ECX-2 unit with 6 volt, 6 watt halogen lamps	ECX-2 (HA)
ECX-2 unit with 6 volt, 8 watt halogen lamps	ECX-2 (HB)
ECX-2 unit with 6 volt, 12 watt halogen lamps	ECX-2 (HD)

Optional Features

	Add Prefix
Black housing	B
	Add Suffix
Damp location listedDL
PulsePlus diagnosticsPPD

Accessories (order as a separate item)

- Clear polycarbonate vandal resistant shieldVRS-EC
- Clear NEMA 4X polycarbonate vandal resistant shieldVRS-EC4X

How To Order Matching Escort Series Remotes

6 volt 5.4 watt incandescent lamp remote head	EF23 (ZP)
6 volt 9 watt incandescent lamp remote head	EF23 (ZD)
6 volt, 6 watt halogen lamp remote head	EF23 (HA)
6 volt, 8 watt halogen lamp remote head	EF23 (HB)
6 volt, 12 watt halogen lamp remote head	EF23 (HD)
LED 6, 12 and 24 volt DC remote exit sign 120/277 AC	ECL4RDC
6 volt 10.8 watts remote DLM-2 unit.....	6DLM-10