

GENERAL DESCRIPTION


The Symmetry Series remote emergency luminaire is a contemporary emergency lighting source, suitable for wall or ceiling mounting and is ideal for damp locations. Softly rounded corners and a non-obtrusive profile allow this product to be located in any retail, commercial, institutional or public access area.

ILLUMINATION

Illumination is provided by MR16 or bi-pin halogen lamps and a high performance, specular parabolic reflector design which can be adjusted 180° vertically and horizontally. A wide variety of lamps are available to meet specific egress requirements. IES photometric files are available at www.chloridesys.com.

DIMENSIONS

"SR" and "SR2" Series

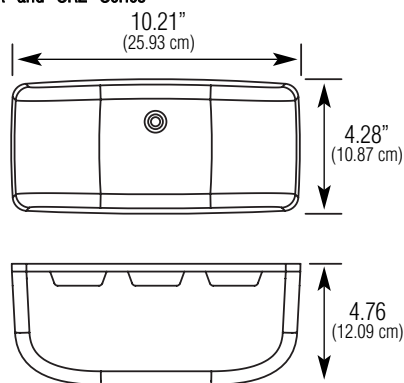

Dimensions are approximate and subject to change.

Symmetry Series

Contemporary Remote Emergency Luminaire 6 or 12 Volt Operation 6 to 20 Watt Lamp Capability



HOUSING

The product backplate is constructed of impact resistant, UL 94 V-0, 5 VA thermoplastic.

The textured cover is UV-stabilized, impact-resistant thermoplastic.

Standard backplate finish is white and is available in black as an option.

Thermoplastic backplate is designed to mount securely to a single gang recessed wall or ceiling junction box.



SHOWN: "SR" & "SR2" SERIES

INSTALLATION

Furnished low voltage supply wires (12") are connected at the junction box to either a 6 VDC or 12 VDC emergency power source.

The backplate is secured via a universal knockout pattern to a recessed junction box (hardware supplied by others).

Keyhole knockout slots are provided for additional support or mounting options.

CODE COMPLIANCE

Meets ADA specifications for wall mounted lighting fixtures

NFPA 101, NEC, BOCA, OSHA and IBC illumination standards

WARRANTY

Three full year warranty on product.

ORDERING INFORMATION (EXAMPLE: SRH6W)

SERIES	LAMP WATTAGE/VOLTAGE	HOUSING COLOR
SR = 6 Volt Symmetry Series	6 Volt H6 = 6W Halogen Bi-Pin H7 = 7W Halogen Bi-Pin	W = White B = Black
SR2 = 12 Volt Symmetry Series	H10 = 10W Halogen Bi-Pin H12 = 12W Halogen Bi-Pin 12 Volt T12 = 12W Halogen Bi-Pin H12 = 12W Halogen MR16 Flood H20F = 20W Halogen MR16 Flood H20S = 20W Halogen MR16 Spot	

Specification Data for Symmetry Series 6 and 12 Volt Remote Emergency Luminaire


GENERAL DESCRIPTION

The "S" Series is gasketed for outdoor areas. Softly rounded corners and a non-obtrusive profile allow this product to be located in any retail, commercial, institutional or public access area.

ILLUMINATION

Illumination is provided by a high performance, specular parabolic reflector design which can be adjusted 180° vertically and horizontally. A wide variety of lamps are available to meet specific egress requirements. IES photometric files are available upon request.

DIMENSIONS

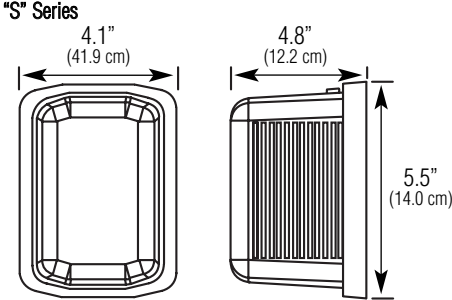

Dimensions are approximate and subject to change.

Symmetry Series

Contemporary Remote Emergency Luminaire
6 or 12 Volt Operation
6 to 20 Watt Lamp Capability

HOUSING

The product backplate is constructed of impact resistant, UL 94 V-0, 5 VA thermoplastic. Standard backplate finish is white and is available in black as an option. Thermoplastic backplate is designed to mount securely to a single gang recessed wall or ceiling junction box.

INSTALLATION

Furnished low voltage supply wires (12") are connected at the junction box to either a 6 VDC or 12 VDC emergency power source. The backplate is secured via furnished hardware to a recessed junction box. Keyhole slots are provided to facilitate installation. The lens/diffuser snaps to the backplate and can be secured without tools. If option "G" (gasketed) is selected, additional caulking may be required around edges of the backplate to provide a proper weather seal.

CODE COMPLIANCE

Meets ADA specifications for wall mounted lighting fixtures
NFPA 101, NEC, BOCA, OSHA and IBC illumination standards

WARRANTY

Three full year warranty on product.



SHOWN: "S" SERIES

ORDERING INFORMATION (EXAMPLE: SH76W)

S				
SERIES	LAMP WATTAGE/VOLTAGE	BACKPLATE COLOR	FACTORY INSTALLED OPTIONS	
S = Symmetry Series	6 Volt, Tungsten T-5 Wedge Base T66 = 6W, 6 VDC T76 = 7W, 6 VDC T96 = 9W, 6 VDC 6 Volt, Halogen T-2 1/4 Wedge Base H76 = 7W, 6 VDC H106 = 10W, 6 VDC H126 = 12W, 6 VDC 6 Volt, Halogen MR11 Style MR5 = Single 5W MR10 = Double 5W	12 Volt, Tungsten T912 = 9W, 12 VDC T1212 = 12W, 12 VDC T1812 = 18W, 12 VDC 12 Volt, Halogen H1212 = 12W, 12 VDC 12 Volt, Halogen MR16 Style ¹ H2012 = 20W, 12 VDC	W = White B = Black	G = Gasketed for Outdoor Use ²
<p>NOTE: 1) Halogen 20 watt, 12 VDC lamp is a MR16 style. 2) A form fitted gasket is supplied to be installed between the luminaire and junction box to protect against water entry. This product is not recommended for use in areas where high wind or high pressure spray washdown could occur.</p>				



CHLORIDE
SYSTEMS

272 West Stag Park Service Road • Burgaw NC 28425
Telephone: (910) 259 1000 • Facsimile: (800) 258 8803
www.chloridesys.com

C1177R10
9/09 IH