

Type No. _____
Job Name _____
Catalog No. _____



Shown: GPREM



GPREM

Recessed Par 36 Adjustable Gimbal Emergency Unit

6 Volt, 8 Watt

Maintenance Free, Sealed
Lead Calcium Battery

Housing

- Aluminum housing and gimbal assembly with a compact, low profile design
- Trim ring and gimbal assembly are standard with a matte white finish
- Easy recessed installation in sheetrock or mechanical ceilings

Battery

- Maintenance free, sealed lead calcium battery has an expected service life of 5 years with an operating range of 65°F (19°C) to 85°F (30°C)*

* Increases or decreases in temperature will affect battery performance and/or capacity. Optimum battery performance realized at 77°F (25°C).

Application

- Commercial locations where an adjustable recessed emergency lighting unit is desired

Warranty

Electronics: 1 year

Battery: 1 year full, 4 years pro-rata

Code Compliance

- UL 924 listed
- NFPA 101, NEC, BOCA, OSHA, and IBC illumination standards

Electronics

- 120/277 VAC dual voltage input capability
- Environmentally coated, fully automatic solid-state charger restores battery to full charge within UL 924 specifications
- Brownout protection activates lights when AC voltage drops 20% below nominal
- Low voltage disconnect prevents deep battery discharge
- Labor saving AC lockout feature
- All electronics are completely self-contained
- Charge rate pilot light and test switch

Electrical Specifications

120 VAC - 0.07 amps, 8.4 watts


277 VAC - 0.04 amps, 8.8 watts

Emergency Operation - 10.0 watts output capability

Ordering Information

GPREM
SERIES
GPREM = Recessed Gimbal Halogen Fixture

Dimensions

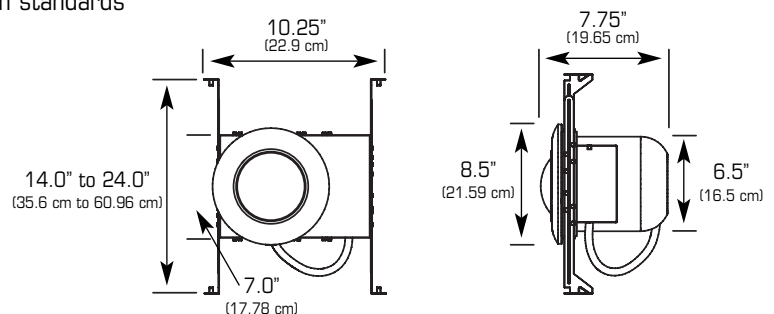

Dimensions are approximate and subject to change.



Shown: **GPR86**



GPR

6 and 12 Volt Remote Gimbal Fixtures

Features

- Requires 6 or 12 volt emergency power from a remote source
- Aluminum housing and gimbal assembly
- Utilizes Par 36 sealed beam tungsten and halogen lamps
- Fully recessed design
- Installation in mechanical and sheetrock ceilings

Ordering Information

SERIES	
Tungsten	Halogen
GPR86 = 6 volt, 8 watt	GPR812 = 12 volt, 8 watt
GPR186 = 6 volt, 18 watt	
GPR256 = 6 volt, 25 watt	
GPR1812 = 12 volt, 18 watt	
GPR2512 = 12 volt, 25 watt	

ACCESSORIES (ORDER AS A SEPARATE ITEM)
SC = Bar hanger kit for mechanical ceilings

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



272 West Stag Park Service Road • Burgaw, NC 28425
(910) 259-1131 • FAX (800) 403-6927
www.lightguard.com

L2106R9
5/09 IH