

Type No. _____
 Job Name _____
 Catalog No. _____



Explosion Proof Lighting Fixtures

INCANDESCENT

AC Only, Emergency Operation, or
 AC/Emergency Operation


COMPACT FLUORESCENT

AC Only or AC/Emergency Operation

UL Listed for Use in Hazardous Areas




HAZP76



Pendant Mount




HAZC126



Ceiling Mount




HAZW106



Wall Mount



HAZP126 with EFK



Pendant Mount with Optional Exit Accessory

HAZ Series Fixtures

- Copper-free aluminum construction
- High impact, heat resistant globe
- Cast aluminum globe guard
- Corrosion-resistant, epoxy powder coat finish
- Stainless steel external hardware
- Ceiling and wall mount fixture has universal junction box with four tapped holes for 3/4" rigid conduit (3 close-up plugs provided)
- Pendant mount fixture has 3/4" top hub
- Utilizes halogen incandescent or compact fluorescent lamps
- Optional exit accessory

Code Compliance

- UL listed for use in :
 - **Class I:** Div. 1, Groups C & D, Zones 0, 1 & 2, Groups IIA, IIB + H₂ & IIC
 - **Class I:** Div. 2, Groups C & D, Zone 2, Groups IIA, IIB + H₂ & IIC
 - **Class II:** Div. 1, Groups E, F & G
 - **Class II:** Div. 2, Groups F & G
 - **Class III**
- Temperature performance ratings (maximum ambient temperature 160°C)
 - P13, P26, 76, 106, 126, 1212 = T6

Dimensions are approximate and subject to change.


Explosion Proof Lighting Fixtures

Ordering Information

HAZ				
SERIES	MOUNTING	LAMP WATTAGE	VOLTAGE ¹	ACCESSORIES (Ordered Separately)
HAZ = Hazardous Fixture	P = Pendant C = Ceiling W = Wall	AC ONLY NON-EMERGENCY Blank = Incandescent P13 = 13W Compact Fluorescent P26 = (2) 13W Compact Fluorescent EMERGENCY ONLY Incandescent 76 = 6V, 7W Halogen 106 = 6V, 10W Halogen 126 = 6V, 12W Halogen 1212 = 12V, 12W Halogen AC/EMERGENCY Compact Fluorescent P7 = 7W Compact Fluorescent ²	AC ONLY Incandescent Blank = AC Only Compact Fluorescent 120 = 120 VAC 277 = 277 VAC	AR = 25° angle dome reflector EFK = Exit accessory kit (red letter only) OB3 = 3-way explosion proof 3/4" conduit hub SDR = Straight dome reflector SEA = Swivel elbow arm for use with pendant mount fixture to connect to OB3 or ESBS unit

NOTES: 1) Voltage designation required only for non-emergency luminaires utilizing compact fluorescent lamps (not included). Incandescent, non-emergency models use (1) 150W A19 lamp (not included). 2) For "Normally On" use exclusively with ESBSPN14 Emergency Power Unit. Maximum remote mount distance is 8 feet.

Ordering Example

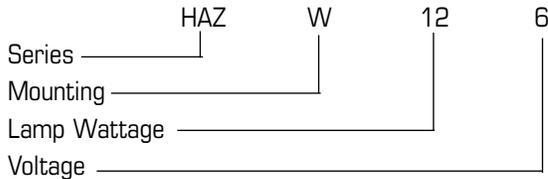

Directional Head




EVLA12

- Class I, Div. 1 & 2, Groups B⁺, C & D; Class II, Div. 1, Groups E, F & G; Class III; NEMA 3, 3R, 12
- Temperature performance ratings: Class I = T4A; Class II = T3B; Class III = T3B. Maximum ambient temperature is 55°C
- Can be attached or removed from ESBS50 or removed from a non-hazardous area via a 12 VDC battery unit (i.e. B200)
- 12V, 12W halogen lamp included
- Fully adjustable head assembly
- Epoxy coated, copper-free cast aluminum construction

ORDERING INFORMATION (Ordered Separately)

⁺ To order for Group B, add suffix "GB"

SERIES
EVLA12 ⁺ = 12V, 12W Directional Head

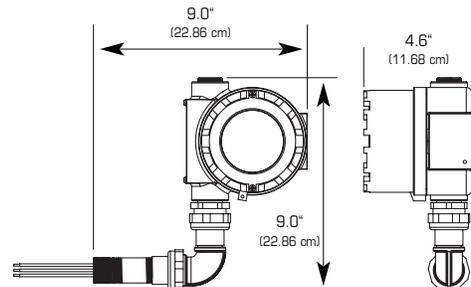

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



272 West Stag Park Service Road • Burgaw, NC 28425
(910) 259-1131 • FAX (800) 403-6927
www.lightguard.com

L2062R9
5/09 IH