


DIMENSIONS



DESCRIPTION

The RSQ Recessed Square Series provides a decorative unit combined with a low-profile recessed design, ideal for illuminating stairways, doorways and offices. Halogen bi-pin lamps are standard. Mounting brackets are supplied to facilitate installation.

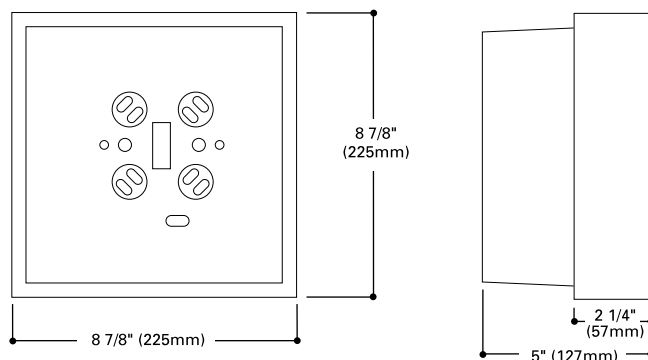

RSQ Recessed Square

**Steel Recessed
Emergency Unit
Incandescent Lamps**

ORDERING INFORMATION

Catalog No.	Total Watts 1.5 Hours	DC Voltage	Lamp No.	Lamp Description	Remote Cap. (watts)
6RSQ10	10	6	6HB10	6v, 10 watt Halogen Bi-Pin	—
6RSQ27	27	6	6HB10	6v, 10 watt Halogen Bi-Pin	17

OPTIONS: Add to Catalog No.

Description	Code
Adjustable bars	AB1
Laser Option Installed	L*
Laser Option installed with pointer supplied	LP*
Recessed Frame-In Kit	RFK-1

* See page 40 for time delay selection.

Note: Unit may be surface mounted with no additional hardware

EMERGENCY LIGHTING

- Dual 120/277VAC 60Hz input
- Solid state charging and transfer circuitry (no relays are used)
- Two step charger, temperature compensated
- Circuit is battery short circuit and reverse polarity protected
- Brownout protected
- Line latched transfer circuit, output is electronically short circuit and overload protected
- Low voltage disconnect
- Meets or exceeds all current UL924 requirements and applicable sections of the Life Safety Code
- Standard finish, durable white powder coat; housing fabricated with 20 gauge cold rolled steel
- Mounting brackets supplied
- Sealed maintenance-free long life lead calcium battery
- Local 3 IBEW