ATLITE



XLCNY8 LED Combination

Steel Combination Emergency and LED Exit Sign

EXIT LIGHTING

- Dual Voltage Input 120/277 VAC, 60Hz
- Solid-state circuitry-no mechanical relay is used
- Output short-circuit and reverse polarity protected
- Transfer with AC linelatching
- Brown-out protection
- Sealed, maintenance-free lead calcium battery in self-powered version
- Formed 20 gauge steel housing and face plate construction
- Durable powder coat white finish standard; other finishes available
- Easily removed updated directional chevrons
- Variety of electrical and universal J-box mounting knockouts for easy installation
- Low-profile mounting canopy
- Meets or exceeds all current UL924 requirements, Life Safety Code, NFPA 101, NEC/OSHA and most state and local codes
- · Local 3 IBEW

DESCRIPTION

The AtLite New York City approved Rear Power-Pack Steel LED Combination Exit/ Emergency XLCNY8 Series is illuminated by a field

with remote fixtures is

replicable, high-brightness LED strip. Extra capacity for use

available, providing the ability to power additional exit or

emergency remote fixtures within the same room or adjacent spaces from the XLCNY8 as a central battery

packed unit. It features the


choice of one, two or three

emergency lighting heads, which mount directly to the unit. The emergency lighting

heads are aimable, offering

exceptional illumination for

safe egress. The series exceeds all applicable NEC and NFPA requirements and is UL 924 DIMENSIONS

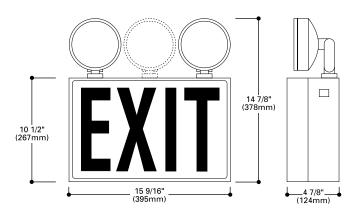

ORDERING INFORMATION

Catalog Number	Operation	Number of Heads	Optional Remote Capacity
XLCNY8	Self-Powered	2 Two heads	25 25 Watts extra (1)
		3 Three heads	34 34 Watts extra (1)
		1 One head	
		0 No heads	

(1) With no heads mounted on main unit

OPTIONS: Add to Catalog No.

8RBK
WS
BS
BB
4

ACCESSORIES

Code

Description	Code CM
Ceiling Mounting kit	
(pendant type for ceiling mounting	
allowing for lighting heads)	