

COOPER LIGHTING - SURE-LITES®

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Electrical

- 6V or 12V DC Input Voltage

Construction

- Matches RG1 Series emergency lighting units
- 20-gauge die-stamped steel housing with white baked enamel finish
- Housing adjusts in plaster frame 1 3/8" to accommodate different ceiling thickness
- Bar hangers included for fast, easy installation
- Gimbal trim ring has white paint finish
- Lamp adjusts 40° from vertical with 358° rotation

Code Compliance

- CSA Certified
- UL Listed
- UL Damp Location Listed
- Life Safety NFPA 101

Warranty

- Unit: 1-year

Lamp Data

- 6 Volt Incandescent Sealed Beam
- 12 Volt Incandescent Sealed Beam
- Consult factory for other lamp types.



GFR SERIES

ROUND SPECIALTY REMOTES

CSA CERTIFIED

EMERGENCY LIGHTING

TOTALLY PREDICTABLE
RELIABILITY.

ORDERING INFORMATION

GFR Series

Catalog No.	Finish	Lamp Type	Volts	Watts	Lamp No.	Isofootcandle Diagram No.
GFR2703	White Trim	Incandescent Sealed Beam	6	8	029-03	3
GFR2716	White Trim	Halogen Sealed Beam	12	8	029-16	6

Alternate Lamps: Consult Cooper Lighting Representative
Other Finishes Available: Cooper Lighting Representative

ENERGY DATA

Power Consumption is equal to lamp wattage.

PHOTOMETRICS

Horizontal Distribution

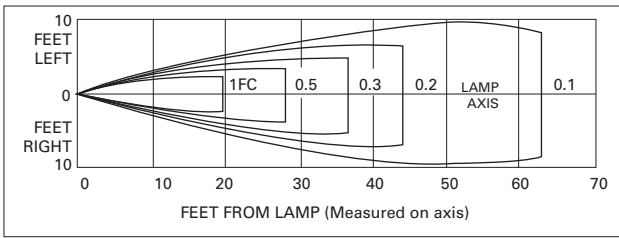


Diagram No. 3 Lamp No. 029-03 @ 108 Initial Lumens

Vertical Distribution

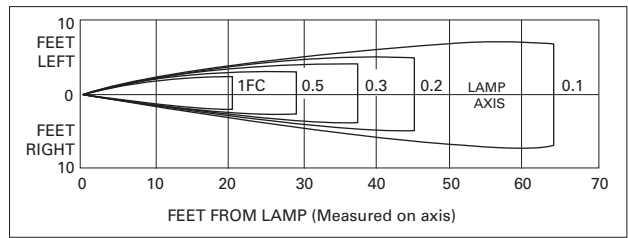


Diagram No. 3 Lamp No. 029-03

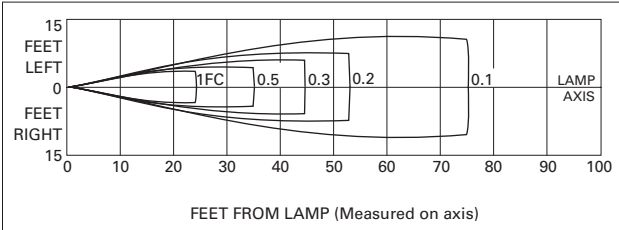


Diagram No. 6 Lamp No. 029-16 @ 155 Initial Lumens

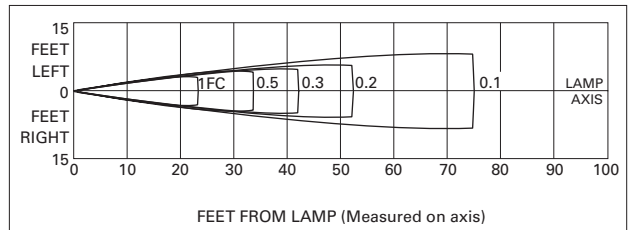


Diagram No. 6 Lamp No. 029-16