

Glo Brite® 7000 Series PF50 Exit Signs

Going green does not have to be expensive

FEATURES:

- Zero energy consumption zero cost, green design
- Zero maintenance no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- 50 feet rated, visibility, readability
- Recyclable
- LEED points qualified

TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4" Letter size: 7/8" stroke with 7" height Background: Black, Red, Green, White Illumination: High Visibility Green Rated Viewing Distance: 50 feet

Directional: (2) Chevron arrows included for easy direction selection Construction: ABS plastic with photoluminescent panel Durability: Explosion-proof/Suitable for floor proximity installation

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL; Meets NFPA Life Safety Code 101 and OSHA requirements; International Building and Fire Code 2009, 2012, 2015

Listed for LED lighting.

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required

INSTALLATION:

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)


APPLICATIONS:

Both high-level and low-level Suitable for floor proximity installation

Catalog #	Frame Col	or No. of Fa	No. of Faces		Mounting Bracket	
70	4 - Green	0 - Single Si	ded	B - Bracket		
	5 - Red	2 - Double S	Sided	CDT-B-C	Conduit Bracket	
	6 - Black					
70				—	(fill in for model #)	
For exam	ple: 7062-B (D	ouble sided Black w	vith bra	cket)		
Catalog #	Frame Color	Letter Outline	No.	of Faces	Mounting Bracket	
7	1 - White	2 - Green	0 - Si	ngle Sided	B - Bracket	
		3 - Red	2 - D	ouble Sided	CDT-B - Conduit Bracket	
7					(fill in for model #)	
For examp	le: 7120-B (Sing	gle sided White wit	h Green	Outline with B	racket)	

Other photoluminescent components of the Glo Brite[®] Safety Guidance System include: Glo Brite[®] Egress Pathway Strips, Glo Brite[®] Tape, Glo Brite[®] Dots and Arrows, Glo Brite[®] Stripe Tape, Glo Brite[®] Safety Track, and Glo Brite[®] Safety Signage.

Type:Approved By:
Approved By:
Distributor:

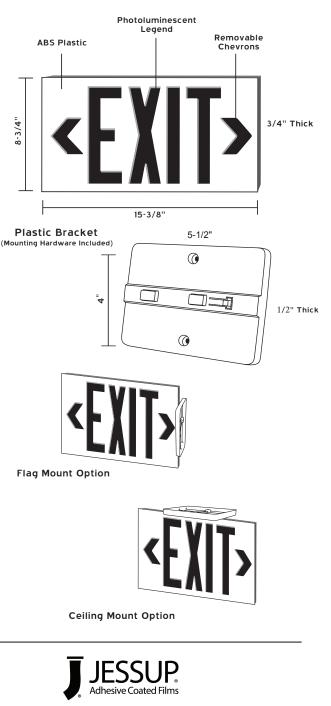

Jessup Manufacturing Company ph: 815.385.6650 fax: 815.385.0079 Internet: www.jessupmfg.com E-mail: jmc@jessupmfg.com



