



TYPE \_\_\_\_\_


CATALOG# \_\_\_\_\_

### Self Luminous Exit (TRITIUM GAS)

INDUSTRIAL SERIES



#### DIMENSIONS

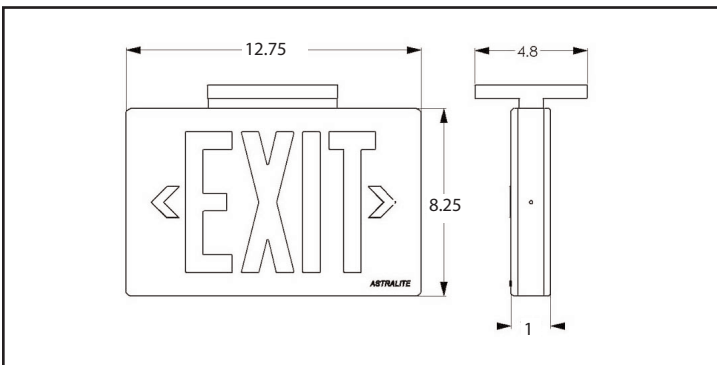

#### Illumination

Internally illuminated by sealed tritium gas light sources.

Requires no electrical wiring or batteries, and no maintenance.

Green light output for maximum visibility in dark conditions. No external light or power is required for activation.

Lamps guaranteed for up to 20 years of continuous operation.

Observation tested for 125 feet visibility in complete darkness.

Thermo plastic injection molded flame rated housing.

Universal, field adjustable chevrons and universal mounting brackets.

ETL listed. Meets UL 924 and NFPA 101, NEC Art. 500 Class I and II conditions.

Warranty: 1 year construction and up to 20 years or as ordered for illumination.

SL

Model

Life

No. of Faces

Face Color

Housing Color

Factory Installed Options

10- 10 Years  
15- 15 Years  
20- 20 Years

1  
2

R- Red  
G -Green

W - White  
B - Black

WG WIRE GUARD  
AF ALUMINUM FRAME  
PC POLYCARBONATE WINDOW  
RM RECESSED MOUNT  
IF INSTITUTIONAL FRAME  
PM PENDAND MOUNT  
SC SECURITY COVER