

| | |
|----------|-----------|
| DATE: | COMMENTS: |
| PROJECT: | |

FEATURES

- Requires no electricity or external light source
- Tamper-proof design
- Maintenance free – no lamps or batteries to replace
- Easy to install – no wiring required
- Ideal for damp, wet, explosion proof, and extreme temperature applications
- Custom wording and pictograms available
- Service life – 10 or 20 year options available



ORDERING INFORMATION 2040-07-10-2-BK-BA-MTE

| 1. SERIES | 2. SERVICE LIFE | 3. FACE COUNT | 4. FACE COLOR | 5. FRAME COLOR | 6. MOUNTING | 7. OPTIONS |
|-----------|--------------------------|---------------|---|--|---|---|
| 2040-07 | - | 2 | - | - | - | - |
| | 10 10 Year 20 20 Year | 2 Double | BK Black G Green R Red BZ Bronze | BA Brushed Aluminum BK Black WH White BZ Bronze | MTE Top/End Mount MPA 12" Pendant Mount MPB 24" Pendant Mount MPC 36" Pendant Mount MPD 48" Pendant Mount | BLANK = NO OPTION CW Custom Wording VR 1/8" Vandal Resistant Lens |

ACCESSORIES; ORDER SEPARATELY

- WG 2 = Wire guard 14.0" X 10.0" X 4.5"
- WG 3 = Wire guard 14.5" X 6.0" X 10.5"
- WG 10 = Wire guard 13.5" X 12.0" X 16.5"

SPECIFICATIONS

CONSTRUCTION

- Extruded aluminum frame
- Painted extruded aluminum stencil

LETTERS

- 6" high; 0.75" stroke


ARROWS

- Universal chevrons

VIEWING DISTANCE

- 100 foot visibility rating

DIMENSIONS

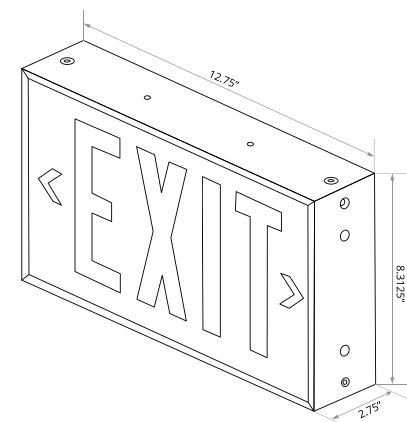

TECHNOLOGY

- Isolite Self-Luminous Signs are illuminated with a light source that consists of glass tubes which are internally coated with phosphor and filled with tritium gas, a natural hydrogen isotope

WEIGHT

- Double Face: 8 lbs
- Single Face: See the 2040-01

TEMPERATURE RATING

- From -67°F to 176°F

APPROVALS

- UL Listed to standard UL924 & CAN/ULC-S572
- NFPA 101 Life Safety Code
- NEC Article 500, Class 1, 11, and 111 conditions

WARRANTY

- Our self-luminous products are warranted against any defects in material or workmanship for the rated life of the product. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website