

# LEDPNL2X4-50W/70W 50/70 Watt 2x4 Ultra-Thin Edge-Lit LED Panel

Project:	
Type:	
Catalog #:	



## STANDARD



The ultra-thin, edge-lit LED panel (LEDPNL) series is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10 vdc dimming capability.

## FEATURES

- Available in 3000k (warm white), 4000k (neutral white) and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide 63,000 hours of operation with at least 70% of initial lumen output ( $L_{70}$ ).\*\*
- LEDPNL2x4-50W Provides 4,652 luminaire lumens (99 lumens per watt, LPW) at both 3000k & 4000k, and 5,062 luminaire lumens (108 LPW) at 5000k.\*
- LEDPNL2x4-70W provides 6,645 luminaire lumens (98 LPW) at 4000k, and 7,325 luminaire lumens (108 LPW) at 5000k.\*
- Uniform illumination with no visible LED pixilation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Aluminum housing.
- PMMA (polymethyl methacrylate) acrylic lens with light guide panels for optimal light distribution and efficiency.
- Suitable for ambient temperatures from -25°C to 45°C (-13°F to 113°F).
- Easy installation in new construction or retrofit.
- Standard mounting options include recessed mounting in grid ceilings, or suspended mounting using attached hanging brackets. Optional surface mounting requires a surface mounting kit (option SMK).

\* Contact factory for other color temperatures and lumen packages.


\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.

## WARRANTY & LISTINGS


- ETL listed to applicable U.L. standards for damp locations and insulated ceilings (IC-rated).
- DLC approved.
- Complies with FCC Part 15.
- 5-year warranty of all electronics and housing.

## SURFACE MOUNTING KIT

- Optional surface mounting kit provides for installation on plaster or other hard ceilings.

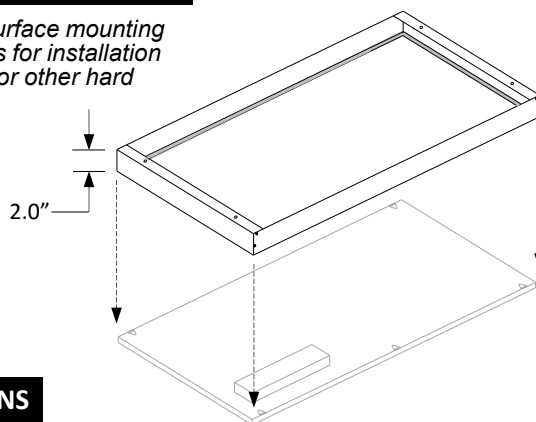

## DIMENSIONS

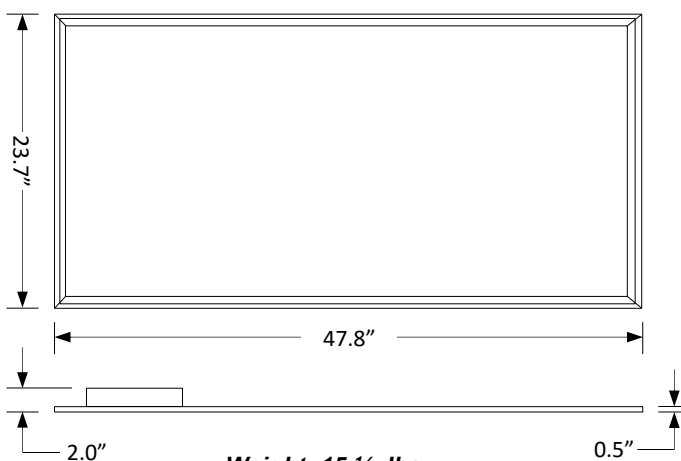

Weight: 15 1/2 lbs.

## ORDERING INFORMATION

Example: LEDPNL2X4-50W-4K-SMK

Model	Luminaire Watts	Color Temperature	Luminaire Lumens	Lumens / Watt	Options
LEDPNL2X4-50W	50 = 50W	3K = 3000k	4,652	99	SMK = Surface Mounting Kit
	50 = 50W	4K = 4000k	4,652	99	
	50 = 50W	5K = 5000k	5,062	108	
LEDPNL2X4-70W	70 = 70W	4K = 4000k	6,645	98	
	70 = 70W	5K = 5000k	7,325	108	

# LEDPNL2X4-50W/70W 50/70 Watt 2x2 Ultra-Thin LED Panel

## ELECTRICAL DATA

Model	Color Temperature	CRI <sup>1</sup>	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage	Input Current (A)			Power Factor	THD <sup>2</sup>	L <sub>70</sub> Hours <sup>3</sup>
							120V	240V	277V			
PNL2X4-50W-3K	3000k	> 80	4,652	47	99	120-277 (50-60Hz)	0.39	0.20	0.17	> 90%	< 20%	63,000
PNL2X4-50W-4K	4000k	> 80	4,652	47	99	120-277 (50-60Hz)	0.39	0.20	0.17	> 90%	< 20%	63,000
PNL2X4-50W-5K	5000k	> 80	5,062	47	108	120-277 (50-60Hz)	0.39	0.20	0.17	> 90%	< 20%	63,000
PNL2X4-70W-4K	4000k	> 80	6,645	68	98	120-277 (50-60Hz)	0.57	0.28	0.25	> 90%	< 20%	63,000
PNL2X4-70W-5K	5000k	> 80	7,325	68	108	120-277 (50-60Hz)	0.57	0.28	0.25	> 90%	< 20%	63,000


<sup>1</sup> Color rendering index

<sup>2</sup> Total harmonic distortion

<sup>3</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM-21-11 calculated hours.

## PHOTOMETRIC DATA

### PNL2X4-50W-4K (4,652 Lumens)

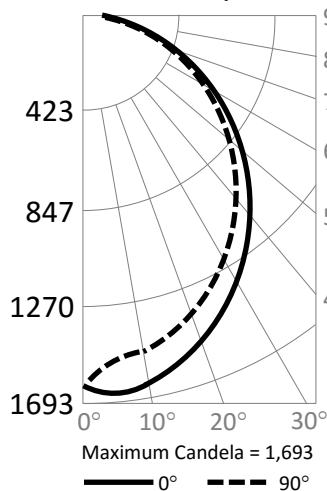


#### Candlepower Summary

	0°	90°
0°	1,621	1,621
10°	1,633	1,489
20°	1,516	1,389
30°	1,341	1,239
40°	1,127	1,042
50°	879	815
60°	612	570
70°	340	305
80°	98	76
90°	0	0


#### Zonal Lumen Summary

Zone	Lumens	% Fixture
0° – 10°	39	0.8%
0° – 20°	346	7.4%
0° – 30°	918	19.7%
0° – 40°	1,677	36.0%
0° – 50°	2,517	54.1%
0° – 60°	3,327	71.5%
0° – 70°	3,999	86.0%
0° – 80°	4,451	95.7%
0° – 90°	4,652	100.0%
90° – 180°	0	0.0%
0° – 180°	4,652	100.0%

#### Cone of Light

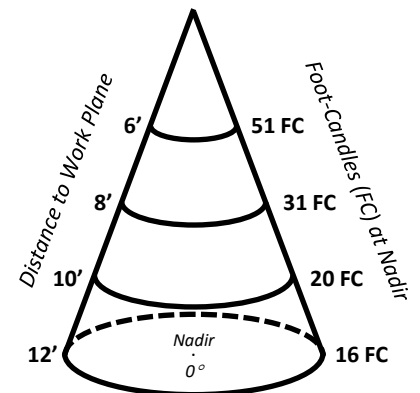

### PNL2X4-70W-4K (6,645 Lumens)

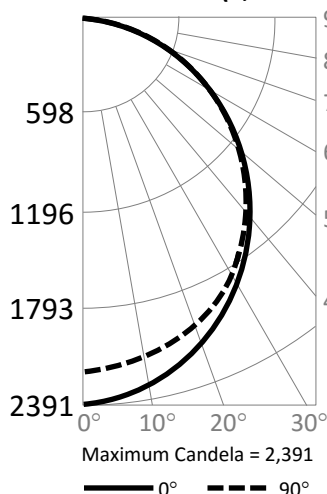

#### Candlepower Summary

	0°	90°
0°	2,384	2,180
10°	2,304	2,140
20°	2,138	2,019
30°	1,891	1,824
40°	1,585	1,561
50°	1,227	1,229
60°	843	869
70°	447	482
80°	107	138
90°	0	0

#### Zonal Lumen Summary

Zone	Lumens	% Fixture
0° – 10°	56	0.8%
0° – 20°	491	7.4%
0° – 30°	1,305	19.6%
0° – 40°	2,388	35.9%
0° – 50°	3,593	54.1%
0° – 60°	4,754	71.5%
0° – 70°	5,718	86.1%
0° – 80°	6,362	95.7%
0° – 90°	6,645	100.0%
90° – 180°	0	0.0%
0° – 180°	6,645	100.0%

#### Cone of Light

