

AESTETICA (A8)

indoor / damp IP40
meets BAA requirements



Job/Location: _____	Job Type: _____
Contractor: _____	Date: _____
Prepared By: _____	

■ The **AESTETICA™** offers design, performance, ease of installation and reliability.

■ **Lamps:** The **AESTETICA™** features a single 8W linear T5 lamp that is included.

Housing: The injection molded ABS housing and clear Lexan diffuser, insures durability, and efficiency.

Low profile design.



■ The compact and low profile design allows the **AESTETICA™** to be incorporated into the architecture of the installation.

■ **Installation:** Can be surface wall or ceiling mounted. The internal housing connection clips securely hold the reflector and diffuser in place and discourage any tampering.

Even light distribution using 8W linear fluorescent T5 lamp.

Vandal resistant design.


NOTE: 3 year warranty standard, see details on next page.

■ specifications: internal

AESTETICA™ features a multi input (120/277VAC) transformer, brown-out and short-circuit protection, and a fully automatic recharge circuit that is regulated by an electronic voltage sensor. Standard 4.8V 2.2Ah nickel-cadmium battery provides a minimum 90 minutes emergency duration, and is protected by a low-voltage cut-off circuit.

■ specifications: external

The **AESTETICA™** is injection molded using corrosion and flame resistant ABS material. Designed to transmit as much light as possible during a power failure. The Lexan constructed diffuser is clear by design and has been UV stabilized to reduce yellowing. The housing color is natural light gray. External test switch and monitor LED are standard.

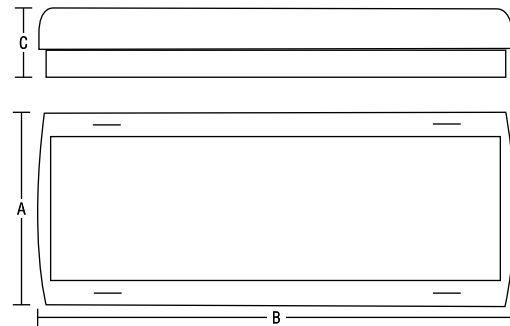

Series	A	B	C
A8	5.3" 135mm	13.25" 337mm	1.8" 46mm

■ ordering logic

Series	Operation	Options
A8	SE (emergency only)	UNV (120/277VAC)

■ builder

Series	Operation	Options

EXAMPLE: A8-SE-UNV
DESCRIPTION: Aesthetic, emergency only, 120/277VAC

■ specifications: electrical


BATTERY: The AESTETICA™ uses a 4.8V 700mAh maintenance free nickel cadmium battery that provides a minimum emergency duration of 90 minutes. Recharge time of batteries is 24 hours.

CIRCUIT: The automatic recharge circuit is regulated by an electronic volt sensor and the battery is protected by a low-voltage cut-off circuit. The AESTETICA™ features a multi input (120/277VAC) transformer and brown-out protection.

■ specifications: mechanical

The AESTETICA™ features vandal resistant design and a single 8W linear T5 lamp that is included. The injection molded ABS housing and clear Lexan diffuser, insures durability, and efficiency. The internal housing connection clips securely hold the reflector and diffuser in place and discourage any tampering.

■ photometrics

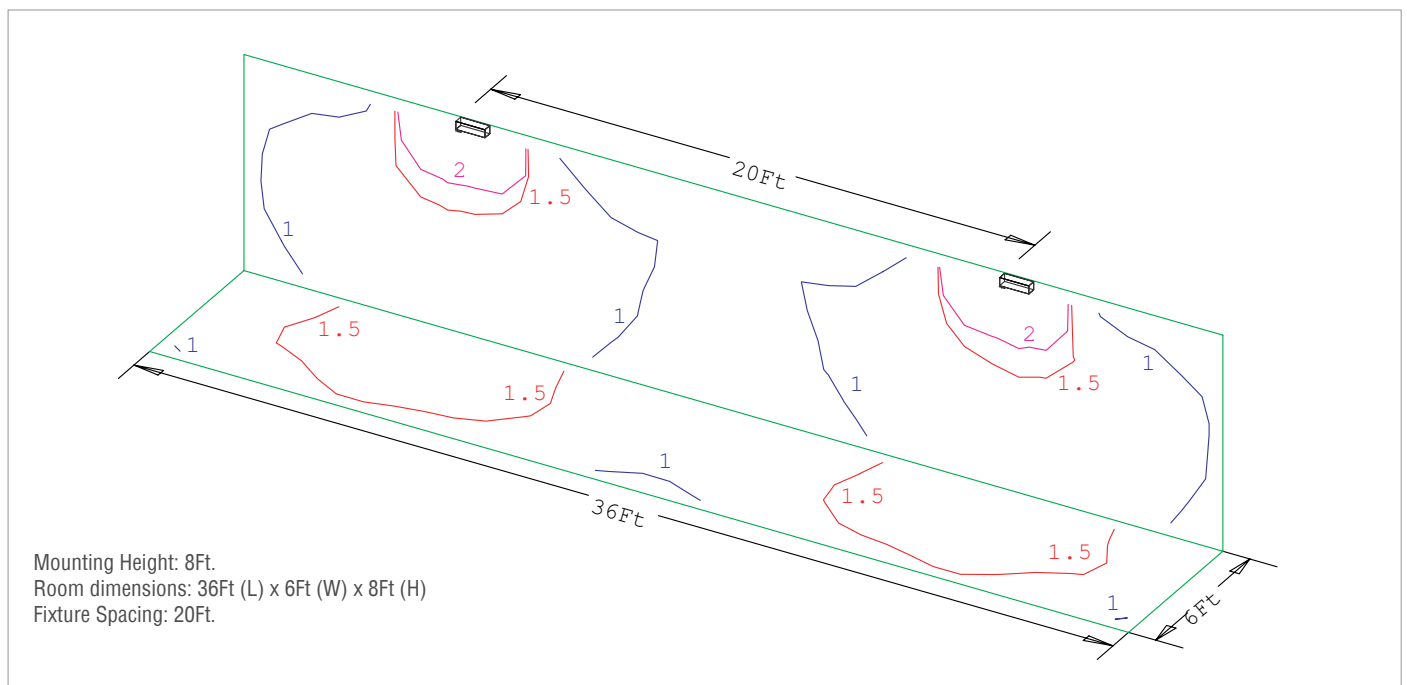

■ fluorescent emergency

The use of fluorescent emergency is standard practice for Beghelli. The benefits are obvious: even light distribution, long lamp life, never having to worry if the lamps are positioned properly, increased fixture to fixture spacing, lighting the entire environment (rather than just the path of egress) and accurate photometrics. The AESTETICA™ does all this in a compact package.

■ warranty

The AESTETICA™ comes with a 3-year factory warranty. Lamp is not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.