

# ATLITE



## Industrial

Steel Industrial Grade  
Emergency Unit  
Incandescent Lamps


### EMERGENCY LIGHTING

- Dual 120/277 VAC 60 Hz input
- Solid state charging and transfer circuitry (no relays are used)
- Two step charger, temperature compensated
- Circuit is battery short circuit and reverse polarity protected
- Brownout protected, line latch transfer circuit
- Output is electronically short circuit and overload protected
- Low voltage disconnect
- Meets or exceeds all current UL requirements and applicable sections of the Life Safety Code
- Standard finish, white powder coat
- Housing fabricated with 18 gauge cold rolled steel.
- Key hole knockouts provided
- 6 or 12 volt long life, maintenance-free, sealed lead calcium battery
- Local 3 IBEW

### DESCRIPTION

The H Industrial Series provides a durable solid-state emergency lighting system for application in industrial and heavy duty commercial facilities. Get reliable performance and freedom from maintenance, and choose from many available options and accessories to customize the installation.

### DIMENSIONS

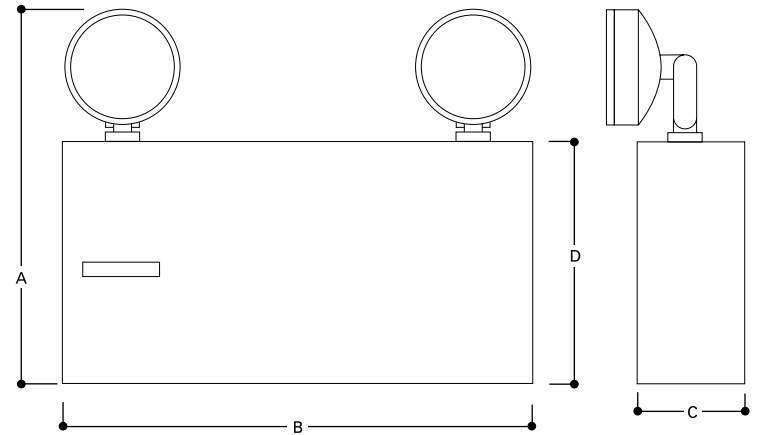

	A	B	C	D
6HC200	13 3/4" (349mm)	17 1/2" (445mm)	4" (101.6mm)	9" (229mm)
12HC200	13 3/4" (349mm)	17 1/2" (445mm)	4" (101.6mm)	9" (229mm)
12HC300	13 3/4" (349mm)	17 1/2" (445mm)	7 1/2" (190.5mm)	9" (229mm)
12HC400	13 3/4" (349mm)	17 1/2" (445mm)	7 1/2" (190.5mm)	9" (229mm)

### ORDERING INFORMATION

Catalog No.	Capacity in Watts (Hours)				DC Voltage	Watts per Head	Replacement Lamp	Ship Wt.
	1.5	2	3	4				
6HC200	200	150	100	90	6	9	6RW9	38
12HC200	200	150	100	90	12	18	12RW9	38
12HC300	300	225	150	135	12	18	12RW9	64
12HC400	400	300	200	180	12	18	12RW9	74
6HCNY7	200	150	100	90	6	9	6RW9	38
12HCNY7	200	150	100	90	12	18	12RW9	38
12HCNY8	300	225	150	135	12	18	12RW9	64
12HCNY9	400	300	200	180	12	18	12RW9	74

### OPTIONS: Add to Catalog No.

Description	Code
No heads	0
One head	1
Three heads	3
Voltmeter <sup>(1)</sup>	V
Ammeter <sup>(1)</sup>	A
Time Delay	TD
Laser Option Installed	L*
Laser Option installed with pointer supplied	LP*
New York City Approved	NY

\* See page 40 for time delay selection.

Non standard voltages (consult factory)

<sup>(1)</sup>Units may not be equipped with a voltmeter and ammeter at the same time.

Notes: N.Y.B.S.A. Calendar (approval) #34013  
MS included on 300w and 400w models.

### HALOGEN LAMP OPTIONS:

Unit	Watt Lamp only	Replacement Lamp no.
6 Volt (all units)	12	6 HB 12
12 Volt (all units)	12	12 HB 12

Note: When using halogen lamps, total connected lamp load must be at least 80% of 90 min. rating, or premature lamp failure may occur.

### ACCESSORIES

Description	Code
<b>Cord Sets</b>	
120 Volt	3 CP
277 Volt (specify male plug type)	3 OP
Mounting bracket (specify model to be used with)	MBI
Mounting shelf (specify model to be used with)	MS
<b>Wire Guards (consult factory)</b>	
<b>Remote Fixtures</b>	
To order, see remote fixtures section	