ATLITE



RFRecessed Rectangle

Recessed Rectangle Less Battery Incandescent Lamps


EMERGENCY LIGHTING

- Recessed rectangular unit with opal diffuser and torsion spring frame
- Mounting bars and brackets BH2.
- Double contact bayonet base lamps only. 6, 12, 24, 32/36 or 120 volt
- Maximum wattage 18 watts
- · Local 3 IBEW

DESCRIPTION

The RF Recessed Rectangle Series, when connected to an emergency battery source, provides remote mount lighting in several trim finishes to match different types of existing installations. Your choice of voltages available in either 1- or 2-socket models.

DIMENSIONS

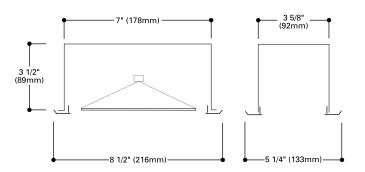

ORDERING INFORMATION

Catalog No.	Description	Trim, specify	Ship Wt.
RF501	1 Socket D.C. Bayonet Base	W White	3
RF502	2 Sockets D.C. Bayonet Base	W White	3

Double contact bayonet base lamps only. 6, 12, 24, 32/36, or 120 volt. Please specify lamp when ordering. Maximum wattage 18 watts.