


FEATURES

- Dual 120/277 VAC 60Hz input
- Solid-state charging and transfer circuitry (no relays are used)
- Two-step charger
- Circuit is battery short circuit and reverse polarity protected
- Universal mounting knockouts
- Low-voltage battery disconnect
- Brownout protected, line-latched transfer circuit

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

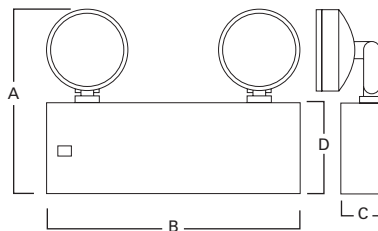

**B BUDGET
EMERGENCY
LIGHT**

ORDERING INFORMATION - NEW YORK CITY

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Max Remote Heads	Replacement Lamp	Dimensions (mm)				Shipping Weight
	1.5	2	3	4					A	B	C	D	
6 VOLT													
6BCNY1	27	22	18	-	2	12	-	6RW12	14" (355mm)	10" (254mm)	2-5/8" (67mm)	9" (229mm)	6
6BCNY18	18	15	-	-	2	9	-	6RW9	14" (355mm)	10" (254mm)	2-5/8" (67mm)	9" (229mm)	10
12 VOLT													
12BCNY2	27	22	18	-	2	12	-	12RW12	14" (355mm)	10" (254mm)	2-5/8" (67mm)	9" (229mm)	13
12BCNY3-3	36	-	-	-	3	12	-	12RW12	14" (355mm)	13" (330mm)	2-5/8" (67mm)	9" (229mm)	17
12BCNY4	54	44	-	-	2	12	2	12RW12	14" (355mm)	13" (330mm)	2-5/8" (67mm)	9" (229mm)	19
12BCNY4-3	54	-	-	-	3	12	1	12RW12	14" (355mm)	13" (330mm)	2-5/8" (67mm)	9" (229mm)	20

ORDERING INFORMATION - NATIONAL

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Max Remote Heads	Replacement Lamp	Dimensions (mm)				Shipping Weight
	1.5	2	3	4					A	B	C	D	
6 VOLT													
6BC10	10	-	-	-	2	5.4	-	6RW5	9-15/16" (252mm)	13-3/8" (340mm)	2-7/16" (62mm)	4-15/16" (125mm)	6
6BC15	15	-	-	-	2	7.2	-	6RW7	9-15/16" (252mm)	13-3/8" (340mm)	2-7/16" (62mm)	4-15/16" (125mm)	8
6BC18	18	15	-	-	2	9	-	6RW9	14" (355mm)	10" (254mm)	2-5/8" (67mm)	9" (229mm)	10
6BC27	27	22	18	-	2	9	-	6RW9	14" (355mm)	10" (254mm)	2-5/8" (67mm)	9" (229mm)	13
12 VOLT													
12BC54	54	44	36	-	2	12	2	12RW12	14" (355mm)	13" (330mm)	2-5/8" (67mm)	9" (229mm)	19

OPTIONS AND ACCESSORIES

Options: Add to catalog number	Description	Code	Accessories: Add to catalog number	Description	Code
	No Heads	0		Cord Sets	
	One Head	1		120 Volt	3 CP
	Three Heads	3		277 Volt (specify male plug type)	3 OP
	Voltmeter (1)	V		Mounting Bracket (specify model to be used with)	MBI
	Ammeter (1)	A		Mounting Shelf (specify model to be used with)	MS
	Time Delay	TD		Note: MB1 and MS are not available on Catalog #6BC10 and 6BC15	
	Non Standard Voltages (consult factory)				
	New York City Approved	NY		Wire Guards (consult factory)	

HALOGEN LAMP OPTIONS

*Only available with OS Head

Unit	Watt Lamp Only	Replacement Lamp Number
6 Volt (all units)	12	6 HB 12*
12 Volt (all units)	12	12 HB 12*

Remote Fixtures (to order see remote fixtures section)

Notes: When using halogen lamps, total connected lamp load must be at least 80% of 90 min. rating, or premature lamp failure may occur.
N.Y.B.S.A. Calendar (approval) #34013.

(1) Units may NOT be equipped with a voltmeter and ammeter at the same time.