

BOLLA REMOTE

INDOOR | VANDAL RESISTANT



Remotes

Job/Location: _____
 Contractor: _____
 Prepared By: _____

Job Type: _____
 Date: _____



■ compact design

The **BOLLA remote** has been designed to blend into the interior design. The clear polycarbonate lens and white powder coated back plate is neutral for any decor.

■ specifications: external

The **BOLLA remote** is designed to withstand the elements and abuse in applications such as schools, corridors, institutions and apartment complexes. Universal knockout mounting pattern and key hole slots are cast into the mounting backplate.

■ specifications: electrical

The **BOLLA remote** series is available with high output LED, LED-MR16, MR16 or GU10 lamps.

■ specifications: mechanical

The **BOLLA remote** is constructed of white powder coated die-cast aluminum mounting plate with an impact resistant polycarbonate protective lens. The **BOLLA remote** mounting plate is standard in an attractive powder coated white finish. Other colors are available, including custom color matching.

■ ordering logic


Series	Lamp No.	Voltage/Wattage	Options
BOL-R	1 (single lamp)	See Lamp Selection	CC (custom color mounting plate)
	2 (double lamp)		BPG9 ¹ (wireguard) TPS (tamper proof screws)

NOTE 1: Order as a separate line item (BPG9).

EXAMPLE: BOL-R-2-12V-5W-LED

DESCRIPTION: Bolla Remote, 2 lamps, 12V, 5W LED

■ dimensions (in, mm.)

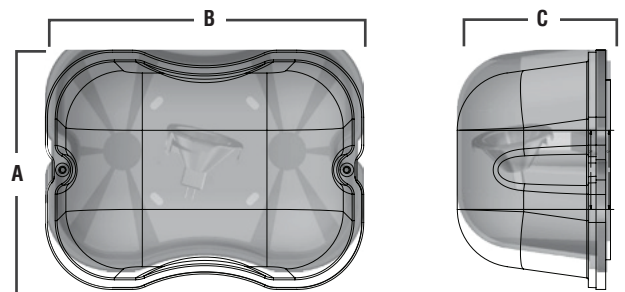

Series	A	B	C
BOL-R	6 1/4"	8 1/4"	3 3/4"
	159mm	210mm	95mm

■ installation

The **BOLLA remote** series is supplied with a universal mounting plate for surface ceiling or wall mount applications. Suitable for indoor applications. The operating temperature is -40°F to 113°F (-40°C to 45°C).

■ lamp selection

Lamp	6V	12V	24V	120V
MR16	6, 10W	10, 12, 20, 35, 50W	10, 12, 25, 50W	N/A
MR16 LED	5, 7W	2, 5, 7W	5, 7W	N/A
GU10	N/A	N/A	N/A	20W

■ warranty

The **BOLLA remote** comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

■ electrical rating

Uncharged					Full Charged						
Power (W)	AC Current (A) AC Voltage		Frequency (Hz)	DC Voltage (V)	DC Current (mA)	Stand By Power (W)	AC Current (A) AC Voltage		Frequency (Hz)	DC Voltage (V)	DC Current (mA)
	120V	277V					120V	277V			
14.56	0.13	0.07	50/60	11.97	0.64	2.1	0.068	0.034	50/60	13.66	0.00

NOTE: Electrical rating is for MR-16 7W/12V LED lamp only.