

Job/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

Job Type: \_\_\_\_\_  
 Date: \_\_\_\_\_




**■ specifications: internal**

120/277V input on all versions. Self-powered versions use maintenance free Nickel Cadmium batteries that provide a minimum 120 minutes of emergency operation. Solid state charger and transfer.

**■ specifications: external**

Durable extruded aluminum housing is paired with a die-cast canopy. The directional arrows are silk screened onto the acrylic panel and must be specified. Housing is finished in either a natural aluminum finish or a white powder coat. Die-cast canopy allows for universal mounting configurations.

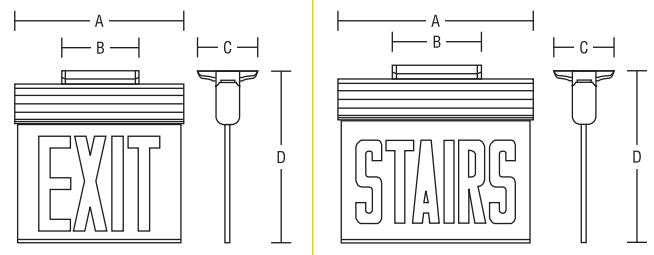

Series	A	B	C	D
EXIT	13"	6"	4 1/2"	13 3/8"
	330.2mm	330.2mm	114.3mm	339.7mm
STAIRS	15 1/4"	6"	4 1/2"	14 1/8"
	384.1mm	330.2mm	114.3mm	83mm

**■ ordering logic**

Series	Model	Letter Color	Face No.	Mounting	Housing Color	Configuration <sup>(1)</sup>	Arrows
C-OL2	HT (AC only)	LR (red)	1 (single)	WS (wall surface)	AL (aluminum)	Blank (EXIT)	NA (no arrow)
	SA (self-powered)		2 (double)		W (white)	Stairs (STAIRS)	DA (double arrow)
							RA <sup>1</sup> (right arrow)
							LA <sup>1</sup> (left arrow)
							LR <sup>2</sup> (left / right arrow)

NOTE 1: Available in single face only.  
 NOTE 2: Available in double face only.

EXAMPLE: C-OL2-SA-LR-1-WS-AL-RA  
 DESCRIPTION: self-powered, red letters, single face, wall surface mount, aluminum housing color, exit, right arrow.

## ■ specifications: electrical

**CIRCUIT:** High efficiency white LED's consume less than 2W. 120/277V input. External test switch and monitor LED are standard. The **C-OL2 SA** version has an internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## ■ specifications: mechanical

The **C-OL2** surface mount edge-lit provides a contemporary and architectural solution. The extruded aluminum housing is available in either a natural aluminum finish or a white powder coat. The die-cast aluminum mounting canopy is color matched and allows for ceiling, end and wall mounting configurations. UV stabilized, silk screened acrylic panels provide consistent, uniform illumination. Meets city of Chicago requirements. Please specify number of faces and arrow configurations.

## ■ self-powered

The **C-OL2 SA** version uses a maintenance free, sealed 4.8V NiCd battery providing a minimum emergency duration of 120 minutes. Recharge time of the battery is twenty-four (24) hours. Rated to operate at 0°-50°C.

## ■ warranty

The **C-OL2** comes with a 5-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.