



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Durable cast aluminum exit sign
- Draws less than 3W
- Designed for ceiling, end, or wall mounting

### CONSTRUCTION

- High strength cast aluminum construction
- Features a hinged faceplate and field-selectable chevrons
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- Long-lasting, high-output ALInGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination in emergency mode

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## CA

### CAST ALUMINUM LED EXIT SIGN



## DIMENSIONS

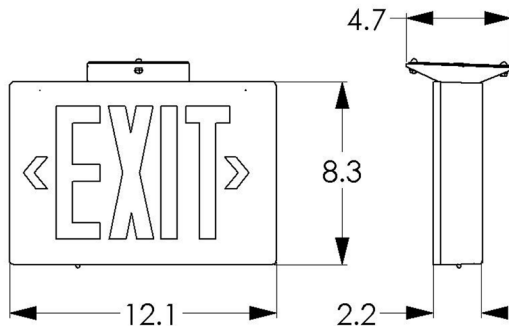

Material	Mounting	Battery	Code Compliance	Dimensions
Cast Aluminum	Wall / Ceiling / End	Nickel-cadmium	UL 924	12.1" W X 8.3" H X 4.7" D

## ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	STENCIL	POWER CONFIGURATION	OPTIONS
CA	1 Single Face Wall Mount 1C Single Face with Canopy 2C Double Face with Canopy	R Red G Green	B Black W White	BA Brushed Aluminum WH White BK Black	AC AC Only EM Battery Backup DI Two Circuit Input	PK <sup>1</sup> Pendant Kit TMP Tamperproof Screw TMPD Tamperproof Screwdriver SD Self Diagnostics

### Notes:

1. Ordered separately; see spec sheet for pendant kit (PK) for more information