# **EU** Remote Capable Compact Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

STANDARD















# **ILLUMINATION**

Long-lasting, energy efficient Red or Green LED EXIT sign illumination

#### **ELECTRICAL**

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- 3.0W of remote capacity standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

# MOUNTING

- EZ-snap thermoplastic mounting canopy included provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

#### HOUSING

Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


### **OPTIONS**

- SPV: UL Listed for special voltage option.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

#### **WARRANTY / LISTING**

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

#### **DIMENSIONS**

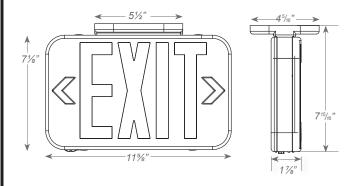

Sample Part Number: CEXTEU3RW

#### ORDERING INFORMATION

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS		
CEXTEU	3	Universal Single/Double	R	Red	W	White	SDT	Self-Diagnostics <sup>1</sup>	
		Face	G	Green	В	Black	SPV	120/230 Volt 50/60Hz <sup>2</sup>	
			RG	Red/Green					

<sup>1</sup> Not available with RG units

NOTES:

# CEXTEU Remote Capable Compact Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

# ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
CEU RG	1.2	N/A	1.2	0.12	N/A	0.12
CEU RED/GREEN	1.2	N/A	1.2	0.12	N/A	0.12
CEU RED SDT	2.5	-	2.5	0.05	-	0.05

# REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY		REMOTE   COMPATIBLE REMOTE HEAD FAM				
		CAPACITY	RHLED	MRHLED	RH16LED	SRHLED	
CEXTEU	3.6V	3.0W	Х	х			