**EXITRONIX** emergency lighting

EXITRONIX CHIR Series works with City of Chicago products CHIX-WB-RC and CHIM-RC. The Chicago indoor remote CHIR series round lamp head and base plate is made of durable 20 gauge steel with a white powder coated finish.

## FEATURES

• Suitable for City of Chicago

• Compatible with CHIX and CHIM series

• Lamps include fully adjustable flex arm

• Mounts directly to J-box, suitable for surface ceiling or wall mount installations

• Up to 40' on-center spacing

## SPECIFICATIONS

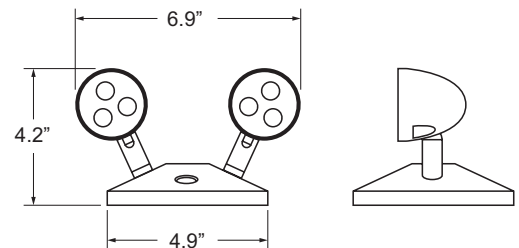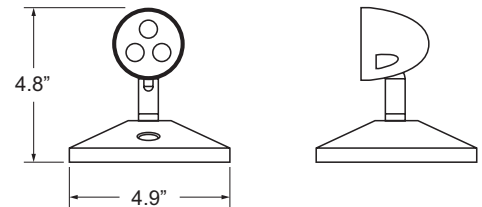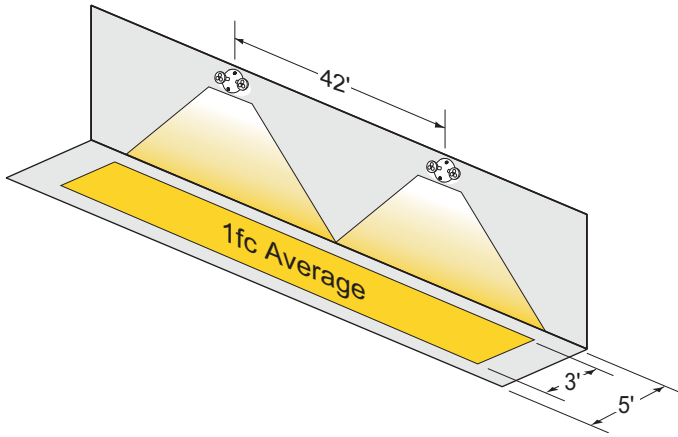| | |
|---|---|
| Illumination: | 1.5W (Single head) or 3W (Double head) LED lamps produce 200 lumens per lamp head; 5000K CCT, 22° beam angle |
| Housing: | 20 Gauge steel with fully adjustable arm |
| Electrical Input: | 6VDC |
| Operating Temp: | 0°C to 50°C (32°F to 122°F) |
| Mounting: | Surface ceiling or wall mount |
| Finishes: | White |
| Certifications: | UL 924 Damp Location Listed, meets or exceeds City of Chicago, NEC requirements and NFPA 101 |
| Warranty: | Any component that fails due to a manufacturing defect is guaranteed for five years. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information (Terms and Conditions apply) |

Model: _____     Date: _____

Accessories: _____

Job Name: _____     Type: _____

## ORDERING INFORMATION Example: CHIR-S-WH

| Series[1] | Style | Finish |
|---|---|---|
| CHIR = City of Chicago Indoor Remote | S = Single Lamp Head | WH = White |
| | D = Double Lamp Head | |
| Notes | | |
| [1] Compatible with CHIX and CHIM series, consult factory for compatibility with other product series | | |

**BARRON** lighting group

**SAMPLE PHOTOMETRICS - 3' PATH OF EGRESS**
Using multiple CHIR units mounted at a typical 7.5' height delivers 42'
on-center spacing with a 3' wide path of egress using 80/50/20 reflectances.



**SAMPLE PHOTOMETRICS - 6' PATH OF EGRESS**
Using multiple CHIR units mounted at a typical 7.5' height delivers 40'
on-center spacing with a 6' wide path of egress using 80/50/20 reflectances.

10800351 Rev 3

**BARRON**®
lighting group

800.533.3948 • www.barronltg.com