

CC SQ

LED COMBINATION EXIT/EMERGENCY LIGHT

tradeSELECT®

FEATURES

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Dual-voltage 120 or 277V AC input
- Includes long-life Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Damp Location Listed 20°C to 30°C (68°F to 86°F)
- Provided with test switch and AC-On indicator
- Lamp-heads are fully adjustable
- Canopy included



RELATED PRODUCTS

[CIR Remote](#)

[COR Remote](#)

SPECIFICATIONS

DESCRIPTION

- The CC SQ Series offers quality and value with a compact and attractive LED based combination emergency light and exit sign
- The white Exit housing and lamp-heads are made of high impact UL flame rated thermoplastic
- The square LED lamp-heads are fully adjustable and glare-free

- Snap together design for quick and easy installation with option of wall or ceiling mount
- The CC SQ Series includes a high lumen output lamp-head run at 1.7 watts per lamp

APPLICATION

- The CC SQ series can be applied in stairwells, hallways, offices and commercial applications

COMPLIANCES

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- OSHA

WARRANTY

- 2 year full unit warranty
- See [HLI Standard Warranty](#) for additional information


ORDERING GUIDE

Catalog Number	Description	Accessories (Order Separately)
CCRHOSQ	White Thermoplastic, Dual Square Lamp Head, Universal Exit Face, Red Letters, Damp Location Listed, 120/277VAC Input, 3.6VDC Output, 1.7W per lamp	WGEL 8"H x 20"W Wireguard x 8" D
CCGHOSQ	White Thermoplastic, Dual Square Lamp Head, Universal Exit Face, Green Letters, Damp Location Listed, 120/277VAC Input, 3.6VDC Output, 1.7W per lamp	

ENERGY CONSUMPTION

	120 VAC	277 VAC
CCRHOSQ	3.9W	3.91W
CCGHOSQ	5.0W	4.85W

DIMENSIONS

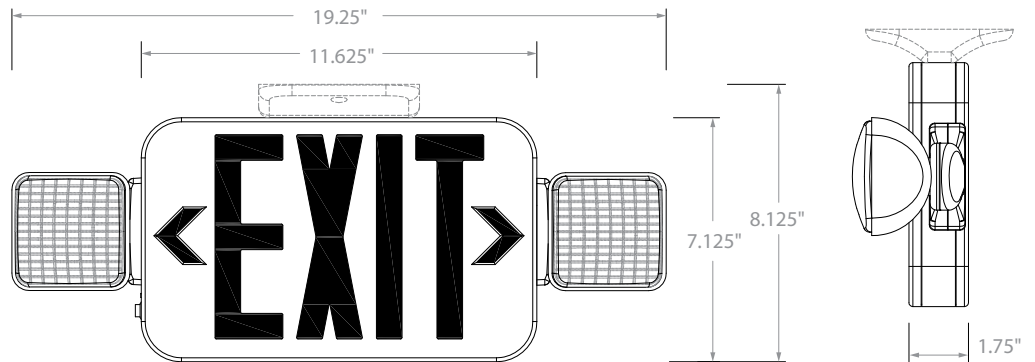

Single Carton Weight	2.5lbs.
Master Carton Quantity	6 each